


LED Architectural Mini Wall Pack

LED Architectural Die-cast aluminium Mini Wall Pack series, CCT selectable with photocell built in with On/Off option, can be widely used in indoor or outdoor lighting (wet location). Excellent optics design, greatly improve the light utilization and evenness, Ideal for museums, art galleries, shopping malls, office buildings, walls, and many other applications.

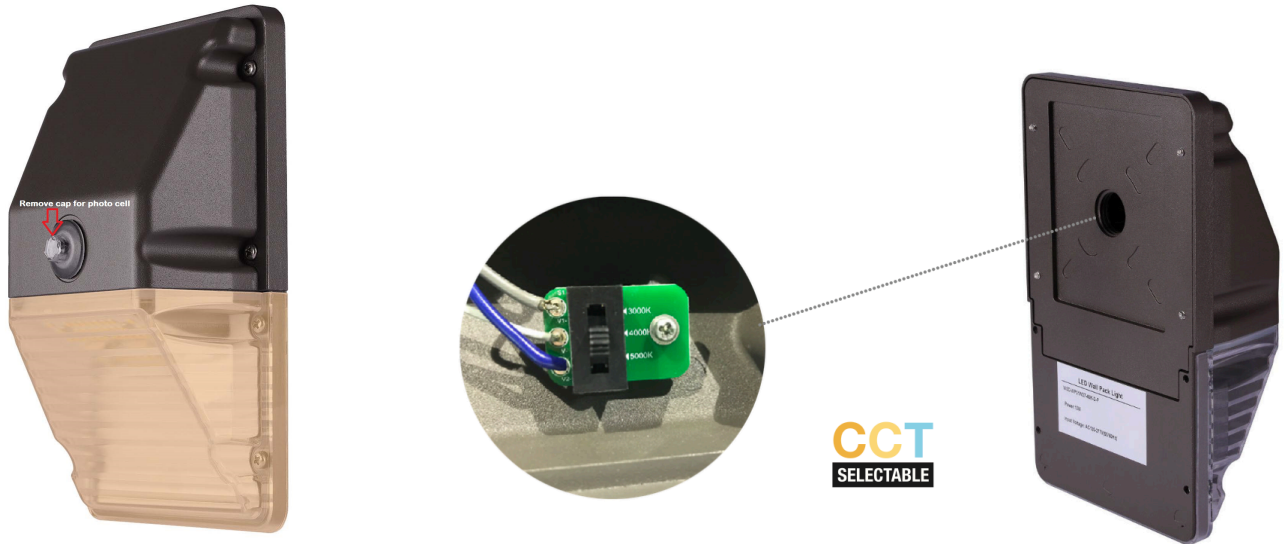


OVERVIEW:

- Efficiency: Up to 150 LPW
- Delivered Lumens: Up To 3,570 lumens
- Power: 15W and 25W
- CCT: 3000K,4000K,5000K
- UL Wet Location Listed
- Warranty 5 years limited
- Beam angle: 112.4°x105.3°
- CRI: > 70

- Input Voltage 1-10v Dim is continuous, compatible with most Lutron and Leviton Dimmers
- Limited Warranty: 5Years, 50,000-hour
- Operating temperature: -22°F to 113°F
- Power factor > 0.95
- Photocell standard built in with On/Off option
- 50,000 hours at 70% lumen maintenance rated life

DIMENSION / WEIGHT / PACKING INFORMATION

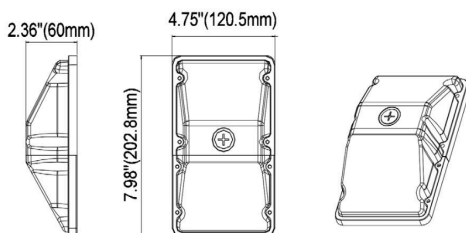

15W/25W

Packing size 1 pcs: 8.46"x5.12"x3.07" Weight: 1.75 LBS

Packing size 12 pcs: 21.46"x9.06"x11.22" Weight: 20.83 LBS

Packing size Pallet 480 pcs: 42"x48"x60" Weight: 820 LBS 40 CTN

MODEL NUMBER


SB-WP015W27-345K-D-P

Series	Wattage	Voltage	Kelvin CCT	Finish	Control
*SB-WP	*015=15W	*27=120-277V	*345K=3000K/4000K/5000K Factory Default Set: 4000K	*D=Dark Bronze Standard	*P=Photocell standard On/Off optional
	025=25W			W=White	
				B=Black	
				S=Silver	

LUMEN OUTPUT

Wattage ±10%	Kelvin±10%	Lumen ±10%
15W	3000K/4000K/5000K	2130 lm / 2250 lm / 2210 lm
25W	3000K/4000K/5000K	3420 lm / 3650 lm / 3570 lm

PHOTOMETRICS: 15W 3000K

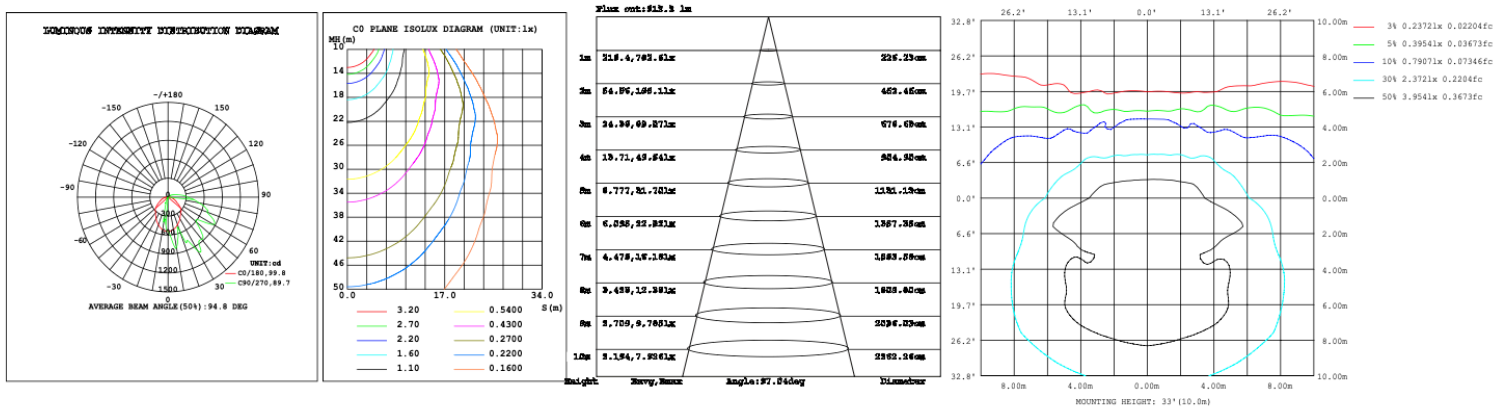

PHOTOMETRICS: 25W 3000K

