

Installation Guide


WARNING:

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.



1. Determine the location for installation and cut ceiling hole in accordance with cut-hole dimensions. Refer to Hole Diameter table for appropriate sizes. (Fig. 1)
2. On the side of the junction box, select the light color temperature: 2700K-3000K-3500K-4000K-5000K. (fig.2)
3. Remove the appropriate knockout(s) on the side panel (Fig. 2).
4. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
5. Using quick-connect push-in terminals, connect the ground wire to the green wire terminal; black wire to black wire terminal; white wire to white wire terminal. (Fig. 2)
6. Place all wiring and connections back into the box and close the cover. Connect the driver to the light panel.
7. Insert junction box through the mounting hole. (Fig. 3)
8. Push spring-loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (Fig. 4)




1



HOLE DIAMETER

DOWNLIGHT	Hole Diameter
3" DOWNLIGHT	3.15" (80mm)
4" DOWNLIGHT	4.33" (110mm)
6" DOWNLIGHT	6.30" (160mm)
8" DOWNLIGHT	8.07" (205mm)


NOTE:
Install ceiling openings with square and round downlights of the same specification, the same way of hole opening

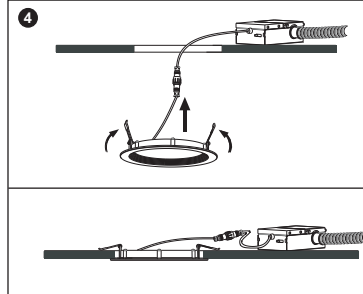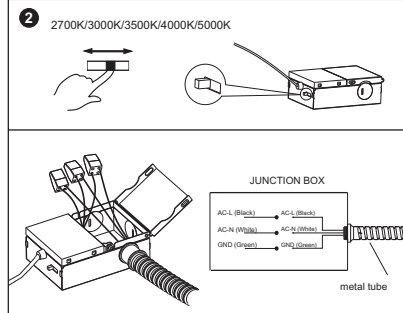

VAPOR BARRIER MUST BE SUITABLE FOR 90 °C
LE PARE-VAPEUR DOIT CONVENIR POUR 90 °C
INHERENTLY PROTECTED
PROTECTION INHÉRENTE
BLINKING LIGHT OF THIS
THERMALLY PROTECTED LUMINAIRE MAY INDICATE
OVERHEATING! L'AMPOULE DE CE LUMINAIRE A
PROTECTION THERMIQUE CLIGNOTE.
CELA PEUT SIGNIFIER UNE SURCHAUFFE
MIN 90°C SUPPLY CONDUCTORS
LES FILS D'ALIMENTATION 90°C MIN

INSTALLATION GUIDE

LED Canless Recessed Baffle Downlight

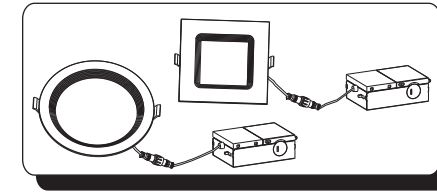



Please take the time to read this installation guide carefully. The guide contains important information and notes regarding installation and operation.

PRODUCT OVERVIEW

Product Specifications

Model No.	Size	Input Vac	Wattage	CCT	Lifespan
HY-BFDL-R3-6W-5CCT	3" Round	120V AC	6W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-R4-9W-5CCT	4" Round	120V AC	9W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-R6-12W-5CCT	6" Round	120V AC	12W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-R8-18W-5CCT	8" Round	120~277V AC	18W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-S3-6W-5CCT	3" Square	120V AC	6W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-S4-9W-5CCT	4" Square	120V AC	9W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-S6-12W-5CCT	6" Square	120V AC	12W	2700K/3000K/3500K/4000K/5000K	5 Years
HY-BFDL-S8-18W-5CCT	8" Square	120~277V AC	18W	2700K/3000K/3500K/4000K/5000K	5 Years


Product Dimensions



Model No.	Side	L1	L2	L3
HY-BFDL-R3-6W-SCCT		Ø 95mm (Ø3.74")	Ø 50mm(Ø1.97")	Ø 77mm(Ø3.03")
HY-BFDL-R4-9W-SCCT		Ø 128mm (Ø5.04")	Ø 81mm(Ø3.19")	Ø 104mm(Ø4.09")
HY-BFDL-R6-12W-SCCT		Ø 182mm (Ø7.17")	Ø 129mm(Ø5.08")	Ø 153mm(Ø6.02")
HY-BFDL-R8-18W-SCCT		Ø 228.5mm (Ø9.99")	Ø 175mm(Ø6.89")	Ø 199mm(Ø7.83")

Model No.	Side	L1	L2	L3
HY-BFDL-S3-6W-5CCT		94.5mm(3.72")	37mm(1.46")	Ø 77mm (Ø 3.03")
HY-BFDL-S4-9W-5CCT		121mm(4.76")	57.5mm(2.26")	Ø 104mm (Ø 4.09")
HY-BFDL-S6-12W-5CCT		171mm(6.73")	92mm(3.62")	Ø 153mm (Ø 6.02")
HY-BFDL-S8-18W-5CCT		217mm(8.54")	125mm(4.92")	Ø 199mm (Ø 7.83")

Product Introduction

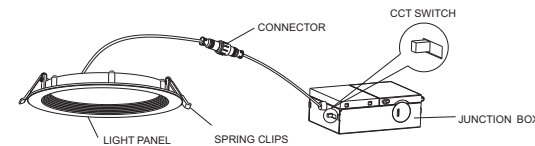

Maintenance

1. Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
2. This product is suitable for damp locations.