



SB-WPT LED Half Moon Wall Pack Up/Down light



OVERVIEW:

DESCRIPTION

The SB-WPT Up/Down Lighting series LED Luminaries with die Cast aluminum cooling design and excellent thermal management makes this fixture ideal for outdoor harsh environmental applications. This Half Moon design up/down lighting paired with high lumen output LED chips and efficient LED drivers makes this decorative wall pack perfect for those looking for a more refined look while obtaining LED efficiency.

Utilizing a High Transmittance anti-impact cover, the SB-WPT series delivers over 93% of its output while offering excellent dust protection waterproof and even distribution.

The SB-WPT series wall pack is ideally suited for strip malls, shopping centres, warehouses, banks, parking garages, and other security applications.

- Efficiency: Up to 110 LPW
- Delivered Lumens: Up To 7,725 lumens
- Input Power: 45W, 70W,
- CCT: 3000K, 4000K, and 5000K
- Power factor > 0.95
- UL/cUL, DLC, FCC Wet Location Listed, IP65
- DLC color 4000k and 5000k

- CRI: >80
- Input Voltage: 100-277V
- Limited Warranty: 5 Years, 50,000-hour at 25°C
- 0-10Vd dimming and photocell available
- Operating temperature: -30°C to 45°C, -22°F to 113°F
- Beam angle: 45°/90°

SPECIFICATION FEATURES

Construction

Constructed of high grade, heavy-duty die cast aluminum. Wet location, IP65 rating achieved utilizing outdoor rated gaskets and sealed driver compartment.

LED modules are protected by a polycarbonate UV protected cover.

Thermal Management

The SB-WPT series provides excellent thermal management using the aluminum housing as a heat sink, drawing heat away from critical components. This enables the Luminaries to withstand higher ambient temperatures without degrading LED life.

Electrical

LED driver and related electrical components are hard wired and mounted to the housing for optimal heat sinking and operating efficiency. 120- 277V, 50/60Hz, 0-10V and photocell available.

Operating temperature range of -30°C to 45°C, -22°F to 113°F

Mounting Options

* Comes standard with surface mounting. Can be mounted facing down or up.

Compliance

cULus listed for Wet location -30°C- 45°C. DLC, lighting facts, FCC listed, RoHS compliant and LED modules comply with IESNA LM-79 and LM-80 standards.

Finish

Finish is powder-coated to promote maximum protection against fade and wear.

All finishes are available in standard Dark Bronze and custom colors.

Warranty

5-year limited warranty.


Optics

45°/90° beam angle is perfect for uniformity.

Available in 3000K, 4000K, or 5000K LED color temperatures (CCT) minimum 80 CRI

DIMENSION

SB-WPT

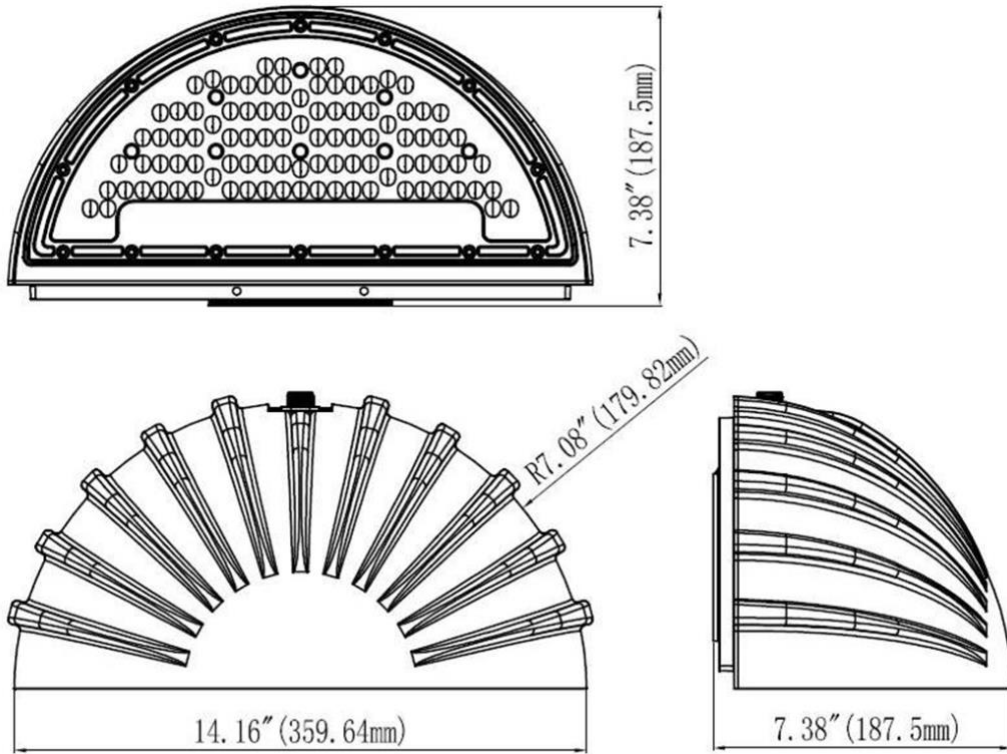

45W



70W



INSTALLATION OPTIONS: Surface mount.

CONTROLS:

120-277VAC PHOTOCONTROL

Universal Voltage photo controls. Dusk-to-dawn

* MODEL SELECTION:

Example: SB-WPT45W27-50-D

Products series	Wattage	Voltage	Kelvin	Finish	Options
SB-WPT	*45W=45w	*27=120-277	30=3000K	B=Black	D=1-10V Dimming
	07w=70W		40=4000K	*D=Dark Bronze (standard)	*Blank=NON-Dimming (standard)
			*50=5000K(standard)	W= White	
				S=Silver	

ACCESSORY ORDERING:

Item Accessory	MODEL NUMBER	DESCRIPTION
Options	SB-P	Field install Dusk to dawn Photocell
	SB-PF	Factory installed Dusk to dawn Photocell

LUMEN OUTPUT

GENERAL PERFORMANCE		
Wattage	KEVIN	DELIVERED LUMEN
45W	3000K	5000
	4000K	5170
	5000K	5310
70W	3000K	8200
	4000K	8347
	5000K	7725