

Selectable Spider Mount Post Top Light

Wattages: 60W, 80W, 100W, 150W



**WATT/CCT
SELECTABLE**

Black finish

Field - Selectable Wattage & Kelvin temp

LED Selectable Spider Mount Post Top Lighting series can be widely used for Outdoor (Wet Location) Excellent for Lawns, Courtyards, Roadways and many other applications.


Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.



FEATURES

- LED high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die-cast aluminum cooling design, high quality and better cooling for LED $T_j < 85^\circ\text{C}$.
- Excellent optics design, greatly improve the light utilization and evenness.
- Photocell (Optional), motion sensor control available(Optional).
- The 1-10V Dimming type is continuous.

DIMENSION:

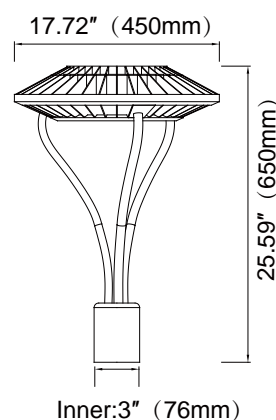

SPECIFICATION

| TYPE | SB-SMPT681015W27-345K-B | | | |
|-----------------------|---------------------------|-------------------------|-------------------------|-------------------------|
| WATTAGE | 60W | 80W | 100W | 150W |
| CCT | 3000K/4000K/5000K | 3000K/4000K/5000K | 3000K/4000K/5000K | 3000K/4000K/5000K |
| LUMEN | 8685lm/9254lm/9305lm | 11264lm/12094lm/12059lm | 13654lm/14787lm/14585lm | 18776lm/20668lm/20030lm |
| EFFICACY | >140 lm/W | | | |
| FACTORY SETTINGS | 150W & 4000K | | | |
| CRI | 70 | | | |
| INPUT VOLTAGE | AC120-277V | | | |
| BEAM ANGLE | 132° | | | |
| POWER FACTOR | 0.95 | | | |
| DRIVER EFFICACY | 90% | | | |
| LED TYPE | 3030 | | | |
| LIFE SPAN | over 50,000 hrs | | | |
| OPERATING TEMPERATURE | -40°F ~ 104°F | | | |
| CERTIFICATES | UL | | | |
| OUTDOOR RATING | Wet location | | | |
| CABLE | 3 core, 18AWG (11.8 inch) | | | |
| WARRANTY | 5 year limited | | | |


Selectable Spider Mount Post Top Light

Wattages: 60W, 80W, 100W, 150W

Bluetooth®
(Option)



Motion sensor ready



WATT/CCT
SELECTABLE

POWER:60W/80W/100W/150W
CCT:3000K/4000K/5000K

STRUCTURE FEATURES:

- ◆ Shell materials: Aluminum & PC
- ◆ Finish:Black(Standard)
- ◆ Net weight : 7.4Kg (16.3 lbs)
- ◆ Product Size : 650mmX450mmX76mm
(25.59"X17.72"X3")
- ◆ Carton Size : 515mmX490mmX185mm
(20.3"X19.3"X7.3")

EMERGENCY BACK-UP (SOLD SEPARATELY)



SB-EMS15W27-XX
15W Emergency Backup
Battery LED Driver



SB-EMS20W27-XX
20W Emergency Backup
Battery LED Driver

CONTROL (SOLD SEPARATELY)



Bluetooth®
ANT-5-4T-BLE-SR
Bluetooth
Microwave
Motion Sensor



ANT-5-4T
Bi-level
microwave Sensor



RC100
Remote
Controller

ORDERING INFORMATION

EXAMLE:

SB-SMPT681015W27-345K-Z[D,W,B,S]-Y[Blank,P]-E[Blank,M]

| SB | SMPT | 681015W | 27 | 345K | Z | Y | E |
|------------|--|---|---------------------------|--|---|------------------------|------------------------------|
| COMPANY | PRODUCT | WATTAGE | VOLTAGE | CCT | FINISH | CONTROL 1 | CONTROL 2 |
| SB LED INC | SMPT (Spider Mount Post Top Light) | 6W -(60W) 8W -(80W) 10W -(100W) 15W -(150W) Wattage selectable | 27 (AC120-277V) | 3K - (3000K) 4K - (4000K) 5K - (5000K) Color selectable | D - (Darkr) Bronze) W - (White) B - (Black) standard S - (Silver) | P - (Photocell) | M -(Motion Sensor) |

Selectable Spider Mount Post Top Light

Wattages: 60W, 80W, 100W, 150W



ANT-5-4T-BLE-SR


Plug and Play Network BLE Nodes and Sensor

The Bluetooth Lighting Control provides automated individual and group control of light fixtures using on sensors and Bluetooth sgmesh technology. The ANT-5-4T-BLE-SR mounted in an Commercial lighting fixture and provides multi-level control solution based on motion and or daylight harvesting contribution.


FEATURES

- Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements.
- Quick connect and adjust different sensor angle.
- Easy commissioning with Mobile App (Available in IOS).
- Bluetooth network with Saas working by computer
- Individual addressability and/or grouping.
- Time clock scheduling for individual lights, groups or scenes.
- Multi-level dimming: manual ON/OFF automatic ON/OFF, and automatic partial ON/OFF, daylight harvesting control capability.

DIMENSION

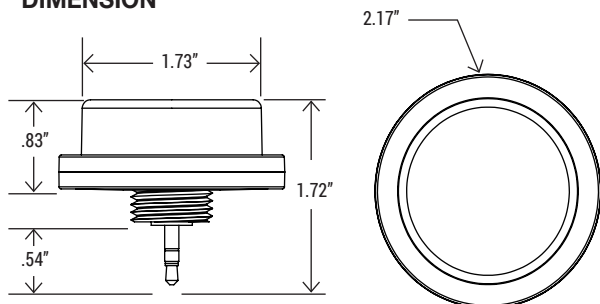

COVERAGE

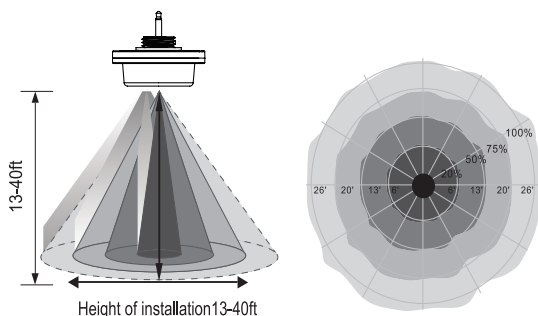

SPECIFICATION

| | |
|-------------------------|--|
| NETWORK BLE MESH | Yes |
| DAYLIGHT HARVESTING | Yes |
| MICROWAVE MOTION SENSOR | Yes |
| DETECTION MODE | Occupancy/Vancancy/Bi-level in 1 Unit |
| OPERATING VOLTAGE | 12-24V DC |
| OPERATING CURRENT | >50mA |
| SINKING CURRENT | max. 25mA |
| CONTROL OUTPUT | 0-10V |
| RADIO FREQUENCY | 2.4GHz ± 75MHz |
| WIRELESS STANDARD | BLE 5.0 MESH |
| PROGRAMMING | Silvair iOS App (IOS) |
| CYBERSECURITY | UL |
| ENCRYPTION | AES 128-bit |
| MESH RANGE | 60ft node-to-node and 500ft node-to-device (Commissioning) |
| SAFETY | cULus Listed |
| FCC | FCC |
| OPERATING TEMP. | -20°C - +60°C |
| IP RATING | IP65 |
| WARRANTY | 5 year limited |

MICROWAVE SENSOR FEATURES

| | |
|-----------------------|---------------------|
| DAYLIGHT HARVESTING | On/Off |
| MOTION SENSING | On/Off |
| FIRST TIME DELAY | 1-59 mins/infinite |
| SECOND TIME DELAY | 0-59 mins/infinite |
| DIM LEVEL | 0-100% |
| MOUNTING HEIGHT | 13-40ft |
| DETECTION RANGE | up to 52ft diameter |
| DETECTION: HORIZONTAL | 360° |
| DETECTION: VERTICAL | 90° |

COMMISSIONING

Silvair iOS App makes it easy to pair devices, create groups, set scenes/schedules, customize dimming levels, and adjust high trim based on application needs.

Silvair App



iOS

Please scan and download the app.


Operation Instruction:

https://youtu.be/8KWPK7z_Tng

Selectable Spider Mount Post Top Light

Wattages: 60W, 80W, 100W, 150W

GateWay Remote Control

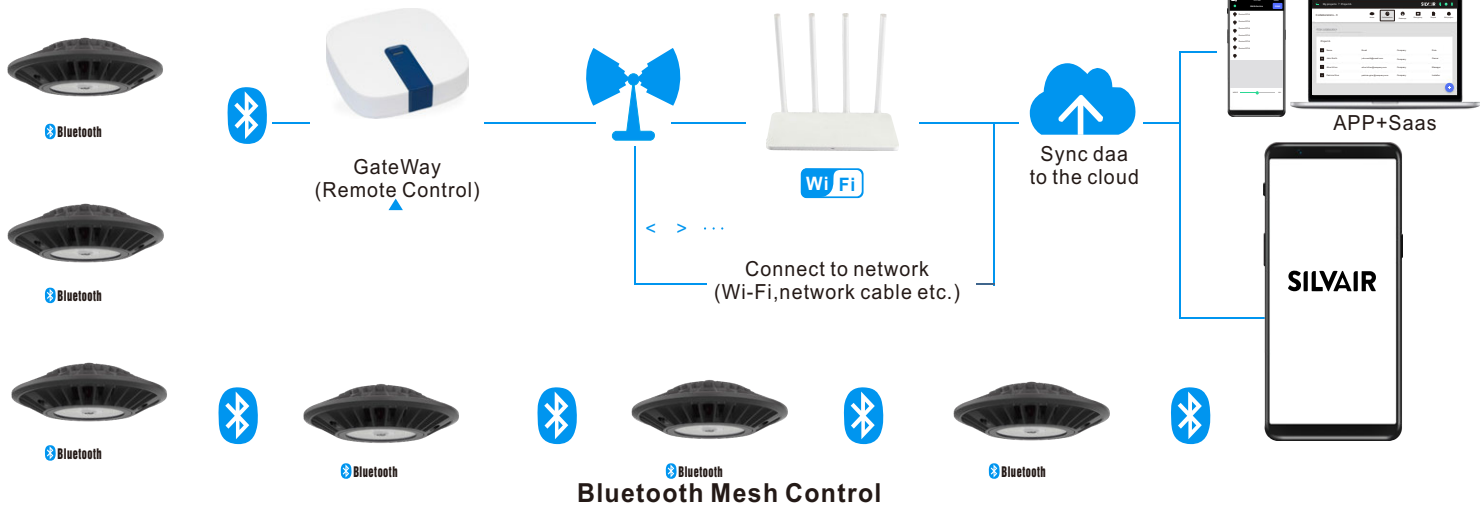

Functions:

The Silvair Gateway enables the following functions in the Silvair web app: •

- Scheduling (available by default)
 - Scheduling changes in scenes and lighting control scenarios (for example occupancy sensing, daylight harvesting) for specific times or days.
- Energy and occupancy monitoring (additional paid service)
 - Visualizing energy use and occupancy via the Silvair web app.
 - Downloading energy and occupancy via the Silvair web app and cloud-based API.
- Remote monitoring and control (additional paid service)
 - Low-latency monitoring of the status of devices in the network via API.
 - Low-latency control of devices in the network via API. • System diagnostics
 - Monitoring of the status of Bluetooth mesh networks.
 - Remote troubleshooting of networking issues.

Features:

- Future-proof Linux operating system.
- Simple commissioning using the Silvair Commissioning tools.
- Automatic connection to the Silvair cloud.
- Secure provisioning with secure IDs and encrypted keys.
- High level of hardware and software security (secure boot and encrypted file system can only be accessed with the management platform).
- Automatic security updates.
- Prompt releases of OS updates and fixes to vulnerabilities.
- Low-latency transfer of network, luminaire, and sensor status data to the Silvair cloud.
- Schedule caching.
- Automatic remote firmware updates.
- Display of gateway and network performance metrics (requires the Silvair web app).

INDUSTRIAL GATEWAY

SGW-101

Smart Engineering Gateway

The Silvair Gateway connects Bluetooth mesh networks that have been commissioned using the Silvair Commissioning tools to the Silvair cloud. This allows the scheduling of events and delivery of services based on the data generated by these networks.

SPECIFICATION

| | |
|-------------------------------------|---|
| POWER SUPPLY | 4.5–5.5 V DC, 2 A Power over Ethernet 36–57 V DC (IEEE 802.3af) |
| OPERATING SYSTEM | Ubuntu Core |
| PROCESSOR | i.MX6ULL (Y2), 32-bit ARM 800 MHz |
| MEMORY | 512 MB DDR3L SDRAM 8GB eMMC |
| COMMUNICATION PROTOCOLS | Bluetooth mesh (2.4 GHz Bluetooth Low Energy) Wi-Fi 802.11a/b/g/n/ac (2.4/5 GHz) 4G LTE Cat 1 with 2G/3G (only for Cascade-500-W and Cascade-500-X gateways) |
| PORTS | 1 x RJ45 10/100 Ethernet 1 x USB 2.0 Type-A 2 x external dipole antenna, 5 dBi (only for Cascade-500-W and Cascade-500-X gateways) |
| REQUIRED AMBIENT TEMPERATURE | 0°C to 60°C 32°F to 140°F |
| ENCLOSURE DIMENSIONS | 127 mm x 127 mm x 30 mm (5 inch x 5 inch x 1.2 inch) |
| MOUNTING POSITION | Wall or surface mounted. As close to the geometrical center of the lighting network as possible, but as far as possible from potential sources of interference. |
| SECURITY | Secure boot with encrypted operating system Secure communication with the Silvair Cloud over Internet (TLS) Secure communication with devices over qualified Bluetooth mesh |

Selectable Spider Mount Post Top Light



SNOWBALL
LIGHTING INCORPORATED




Wattages: 60W, 80W, 100W, 150W


PHOTOMETRICS

For complete IES files, please visit our website.

SB-SMPT681015W27-345K (150W&3000K)

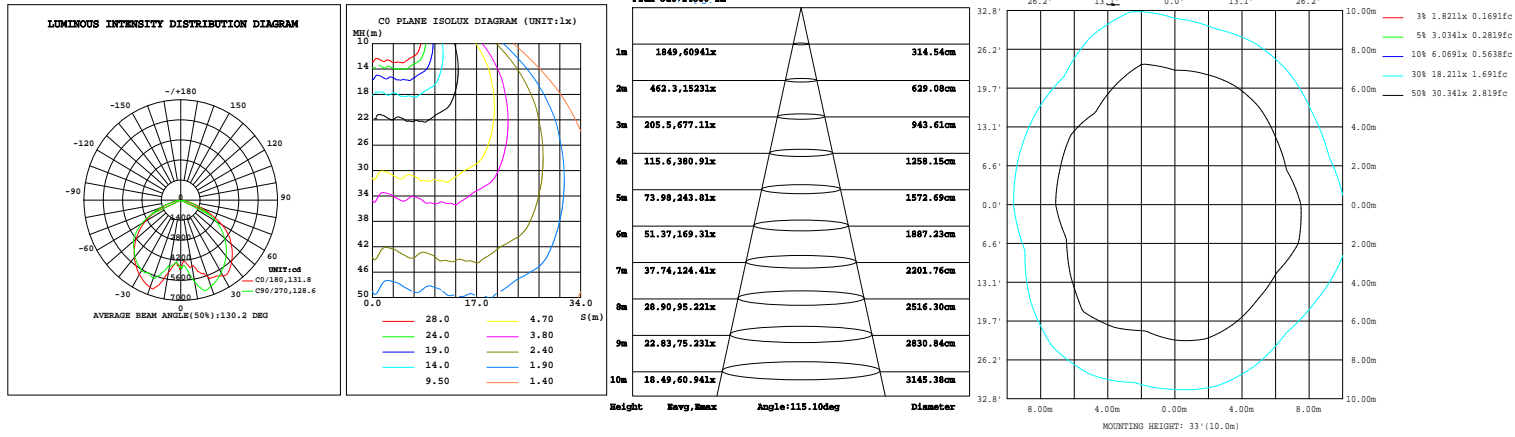

SB-SMPT681015W27-345K (150W&4000K)

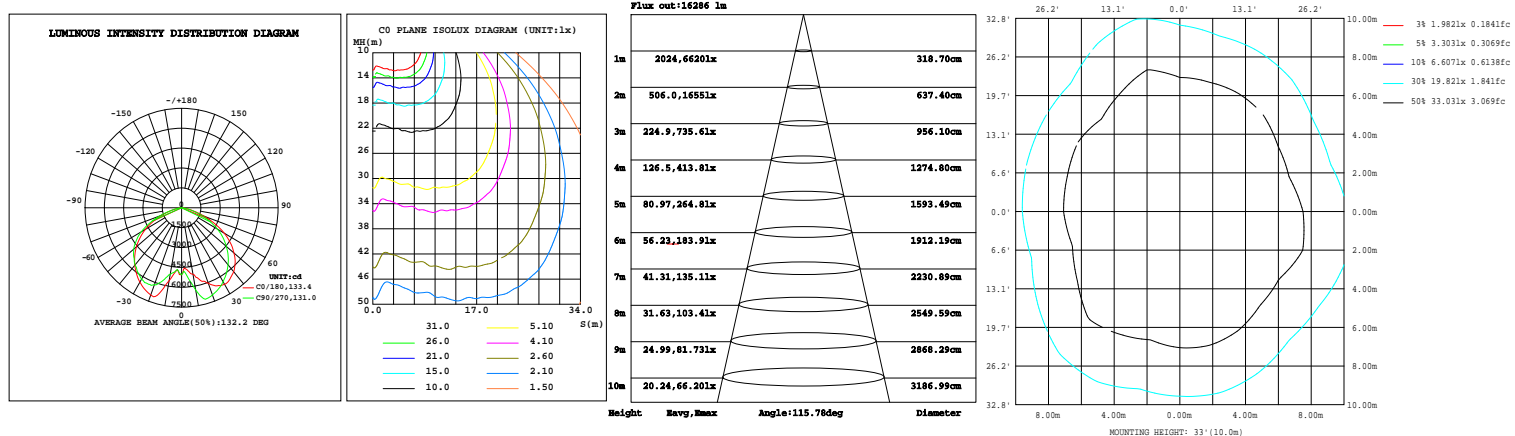

SB-SMPT681015W27-345K (150W&5000K)

