

LED Troffer Retrofit Kit

Wattages: 20W,25W,30W;34W,38W,45W



**WATT/CCT
SELECTABLE**

The Troffer Retrofit Kit LED Lighting Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms , Office Buildings, Conference Rooms,super market, store and many other applications.



Features:

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Mercury-free
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- CCT:3500-5000K
- The 1-10V Dimming type is continuous
- Compatible with most Lutron and Leviton dimmers

Packaging information:

❖ **14RTFD202530W27-3545K:**
1187MMX279MMX123MM(2Pcs/CTN)
(46.73" X10.98" X4.84")

❖ **22RTFD202530W27-3545K:**
580MMX585MMX133MM(2Pcs/CTN)
(22.83" X23.03" X5.24")


❖ **24RTFD343845W27-3545K:**
1187MMX585MMX133MM(2Pcs/CTN)
(46.73" X23.03" X5.24")

SPECIFICATION			
TYPE	14RTFD202530W27-3545K	22RTFD202530W27-3545K	24RTFD343845W27-3545K
WATTAGE	20W/25W/30W	20W/25W/30W	34W/38W/45W
LUMEN	2686 lm/3399 lm/3988lm	2818 lm/3377 lm/3986lm	4538 lm/5185 lm/5750lm
EFFICACY	> 125 lm/W		
CCT	3500K,4000K,5000K		
CRI	> 80		
INPUT VOLTAGE	AC120-277V		
LIGHTING ANGLE	113°		
FACTORY SETTINGS	30W & 4000K		45W & 4000K
LED TYPE	SMD2835		
PF	> 0.98		
DRIVER EFFICIENCY	> 90%		
PROTECTION LEVEL	Damp		
LIFE TIME	> 75000 hours		
WARRANTY	5 year limited		


LED Troffer Retrofit Kit

Wattages: 20W,25W,30W;34W,38W,45W

Control Module:



WATT/CCT
SELECTABLE

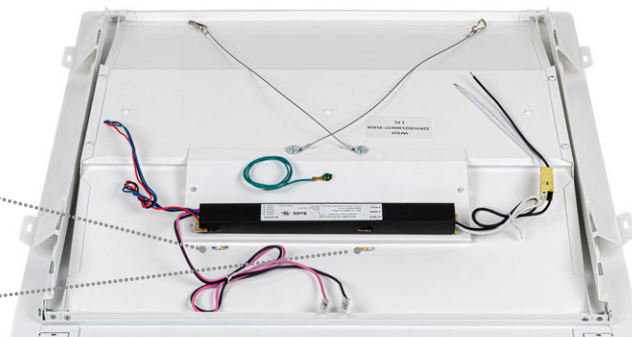

Selectable CCT

Three position sliding switch
3500K / 4000K / 5000K




Selectable Power

Three position sliding switch
20W / 25W / 30W
34W / 38W / 45W


LED Troffer Retrofit Kit

Wattages: 20W,25W,30W;34W,38W,45W

DIMENSION:

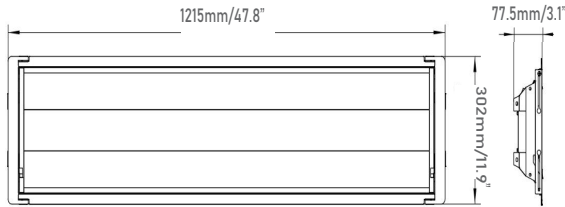

1X4 feet

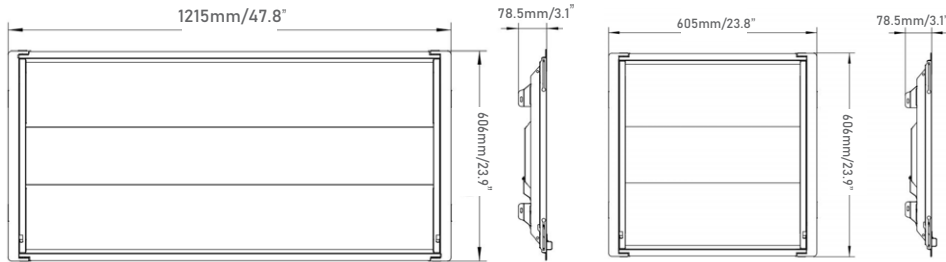

2X4 feet

2X2 feet

Specifications:

Troffer-14/22/24

Length:1215MM/605MM/1215MM
(47.8"/ 23.8"/ 47.8")

Width:302MM/606MM/606MM
(11.9"/ 23.9"/ 23.9")

Depth:77.5MM/78.5MM/78.5MM
(3.1"/ 3.1"/ 3.1")

Net Weight:6.90/7.21/11.33 (lbs)


Mounting:

❖ Embedded installation.

ACCESSORIES: (SOLD SEPARATELY)



SB-EMLY15W27-XX
15W Emergency Backup
Battery LED Driver



6FTPRWG-3/8-3PIN/6FTPRWG-3/8-5PIN
6FTPRWG-3/8-6PIN
6FT 3/8 inch Metal Flexible Conduit

CONTROL (SOLD SEPARATELY)



Bluetooth

BRI810-B-M10-BLE
Bluetooth Microwave
Motion Sensor



RC100
Remote
Controller

ORDERING INFORMATION:

EXAMPLE:

14RTFD202530W27-3545K/22RTFD202530W27-3545K/24RTFD343845W27-3545K

14	RTFD	202530W	27	3545K
SIZE	PRODUCT	POWER	VOLTAGE	CCT
14 - (1X4feet) 22 - (2X2feet) 24 - (2X4feet)	RTFD LED Troffer Retrofit Kit	202530W/343845W 20W/25W/30W 34W/38W/45W	27 AC120-277V	3545K 3500K/4000K/5000K


LED Troffer Retrofit Kit

Wattages: 20W,25W,30W;34W,38W,45W


PHOTOMETRICS:

For complete IES files, please visit our website.

14RTFD202530W27-3545K (30W&3500K)

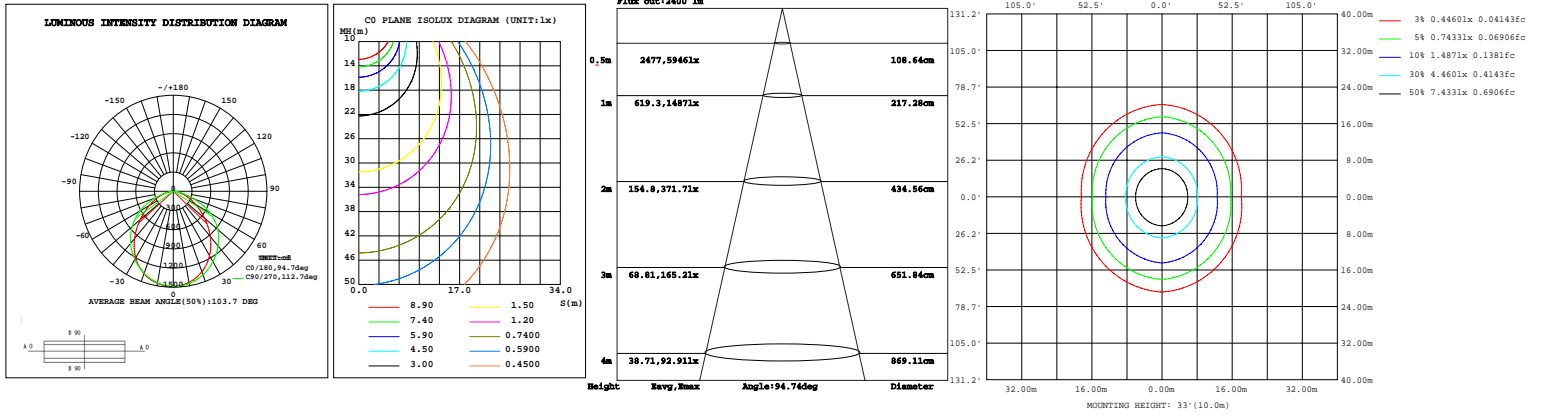

22RTFD202530W27-3545K (30W&3500K)

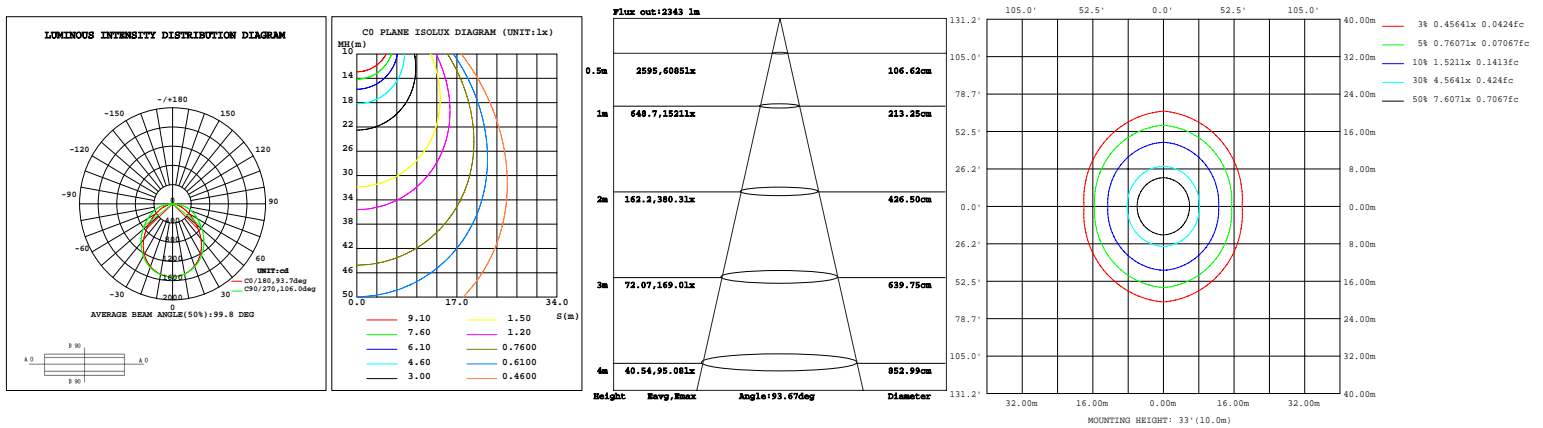

24RTFD343845W27-3545K (45W&3500K)

