

CRI 90+ Selectable Edge-Lit Light Panel

Wattages: 25W,30W,40W,50W



The Selectable Edge-Lit Light Panel Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms , Office Buildings, Conference Rooms,super market, store and many other applications.



Features

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Installation: Recessed;Suspended;Surface-mounted
- Patent design to avoid blue light & water ripper & light spot
- 100% PMMA LGP, never get yellowing
- CCT:3500-5000K
- 5 years manufacturer warranty
- Compatible with most Lutron and Leviton dimmers
- Flicker Free,0-10V dimming to 5%

Packaging information

- ❖ **SB-PL14FT2534W27-3545K**
1260MMX100MMX655MM (2 Pcs/CTN)
(49.61" X3.94" X25.79")
- ❖ **SB-PL22FT2534W27-3545K**
660MMX100MMX655MM (2 Pcs/CTN)
(25.98" X3.94" X25.79")
- ❖ **SB-PL24FT345W27-3545K**
1260MMX100MMX350MM (2 Pcs/CTN)
(49.61" X3.94" X13.78")

SPECIFICATION			
TYPE	SB-PL14FT2534W27-3545K	SB-PL22FT2534W27-3545K	SB-PL24FT345W27-3545K
WATTAGE	25W/30W/40W	25W/30W/40W	30W/40W/50W
LUMEN	2500 lm/3000 lm/4000lm	2500 lm/3000 lm/4000lm	3000 lm/4000lm/5000lm
EFFICACY	> 100 lm/W		
CCT	3500K,4000K,5000K		
CRI	> 90		
INPUT VOLTAGE	AC120-277V		
LIGHTING ANGLE	110		
FACTORY SETTINGS	40W & 4000K		50W & 4000K
LED TYPE	SMD4014		
PF	> 0.98		
DRIVER EFFICIENCY	> 90%		
PROTECTION LEVEL	Damp		
OPERATION TEMPERATURE	-20°C-50°C		
LIFE TIME	> 54000 hours		
IC RATING	Type IC		
WARRANTY	5 year limited		

Selectable Edge-Lit Light Panel




SNOWBALL
LIGHTING INCORPORATED




Wattages: 25W,30W,40W,50W


DIMENSION

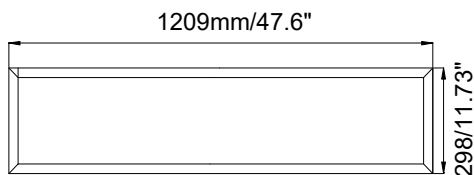

1X4 feet

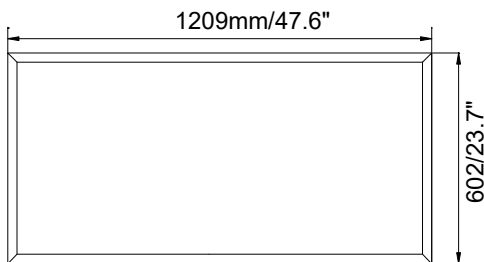

2X4 feet



2X2 feet

Specifications

LPZ -14

Length:1209MM(47.6")
Width: 298MM (11.73")
Depth:45MM (1.77")
Weight:3.09(lbs)

LPZ -22/24

Length:602MM/1209MM (23.7"/47.6")
Width: 602MM (23.7")
Depth:45MM (1.77")
Weight:3.09/5.40(lbs)

Mounting


- ❖ Surface Mounting.
- ❖ Recessed lighting fixture

CONTROL MODULE




WATT/CCT
SELECTABLE

SB-TBAR Mounting Kit (SO LD SEPARATELY)

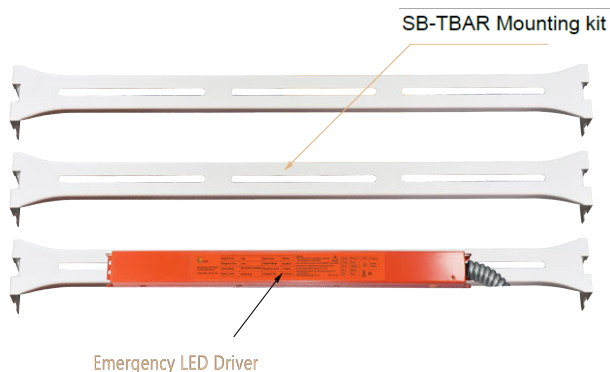

Emergency LED Driver

SBTBAR
Emergency Backup
Battery LED Driver Mounting Kit

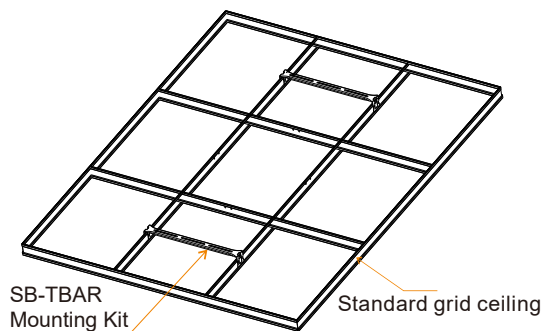

SB-TBAR
Mounting Kit

Standard grid ceiling

SB-TBAR Mounting Kit for Emergency LED Driver When emergency led drivers can not be installed on the LED lights such as LED downlights, LED panel lights&LED troffer. We can install the emergency led drivers on the WSD-TBARs and SB-TBARs are installed on the grid ceiling.


Selectable Edge-Lit Light Panel

Wattages: 25W,30W,40W,50W

ACCESSORIES (ACCESSORIES NEED TO PURCHASED SEPARATELY)



SB-EMLY15W27-XX
15W Emergency Backup
Battery LED Driver

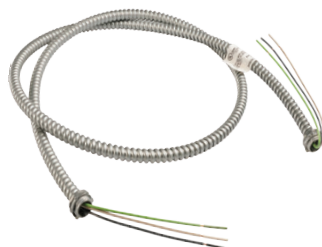

6FTPRWG-3/8-3PIN/6FTPRWG-3/8-5PIN
6FTPRWG-3/8-6PIN
6FT 3/8 inch Metal Flexible Conduit



PANEL2X2-KIT
2X2 feet SURFACE MOUNT KIT



PANEL2X4-KIT
2X4 feet SURFACE MOUNT KIT



PANEL1X4-KIT
1X4 feet SURFACE MOUNT KIT



SB-PLSKY22-W
2X2 feet Skylight Frame for Panel lights



SB-PLSKY24-W
2X4 feet Skylight Frame for Panel lights



SB-PLSKY14-W
1X4 feet Skylight Frame for Panel lights

ORDERING INFORMATION

EXXXAMPLLE:::

SB-PL14FT2534W27-3545K/SB-PL22FT2534W27-3545K/SB-PL24FT345W27-3545K

SB	PL	14	2534W	27	3545K
COMPANY	PRODUCT	SIZE	POWER	VOLTAGE	CCT
SB LED INC	PL Edge-Lit Light Panel	14 - (1X4feet) 22 - (2X2feet) 24 - (2X4feet)	2534W/354W 25W/30W/40W 30W/40W/50W	27 AC120-277V	3545K 3500K/4000K/5000K


Selectable Edge-Lit Light Panel

Wattages: 25W,30W,40W,50W


PHOTOMETRICS

For complete IES files, please visit our website.

SB-PL14FT2534W27-3545K (40W&3500K)

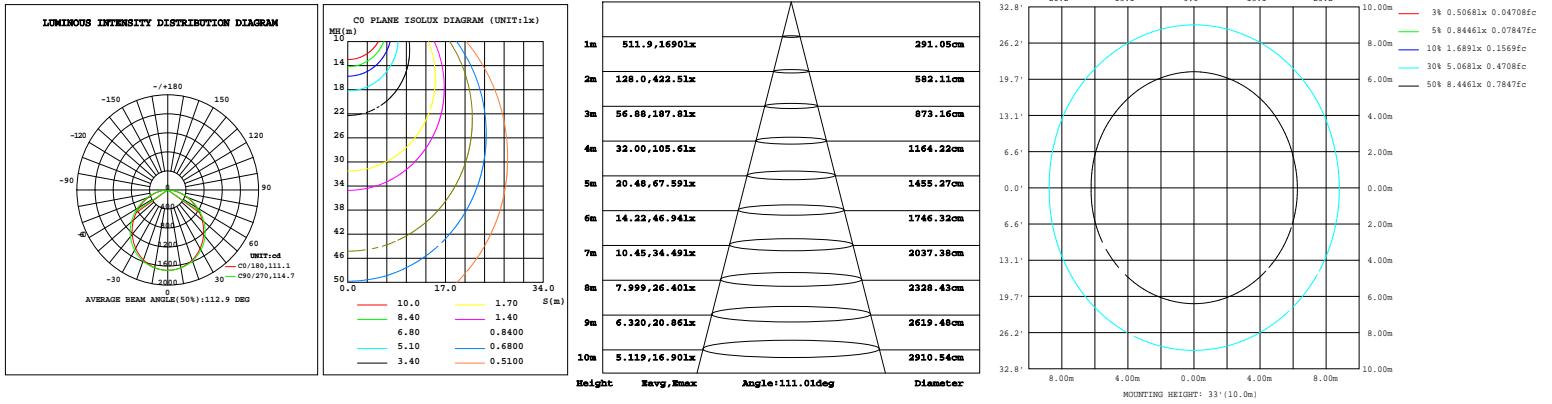

SB-PL22FT2534W27-3545K(40W&3500K)

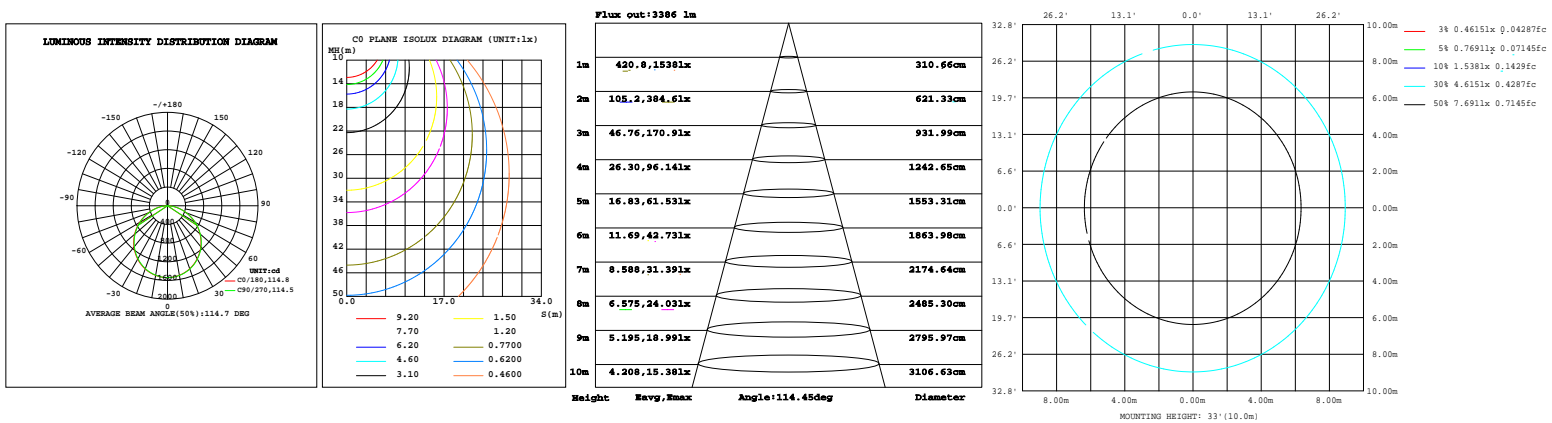

SB-PL24FT345W27-3545K(50W&3500K)

