

Wattages: (4")9W ; (6")12W

Selectable LED Square Slim Panel Light can be widely used in indoor lighting (Wet location) ideal for bathrooms, laundry, porches and garage work rooms.



## FEATURES


- Edge-lit technology, with no glare or dark spots
- Triac Dimmers
- Instant on
- No flicker
- 50,000 hours at 70% lumen maintenance rated life
- CCT:2700-5000K
- 5 years manufacturer warranty

SPECIFICATION		
TYPE	SB-4SSPL9W12-5CCT-W	SB-6SSPL12W12-5CCT-W
WATTAGE	9W	12W
LUMEN	761.84 lm	938.00 lm
EFFICACY	> 80 lm/W	> 80 lm/W
CCT	2700K,3000K,3500K,4000K,5000K	
CRI	> 90	
INPUT VOLTAGE	AC120V	
LIGHTING ANGLE	113	
DIMMABLE	Triac Dimming	
LED TYPE	SMD2835	
CERTIFICATE	ETL	
RATING	Wet Locations	
DESCRIPTION	CCT Adjustable	
LIFE TIME	50000 hours	
FACTORY SETTINGS	4000K	
OPERATING TEMP	(-4°F~ 113°F) -20~45°C	
WARRANTY	5 year limited	


# Selectable LED Square Slim Panel Light

Wattages: (4")9W ; (6")12W


## DIMENSION

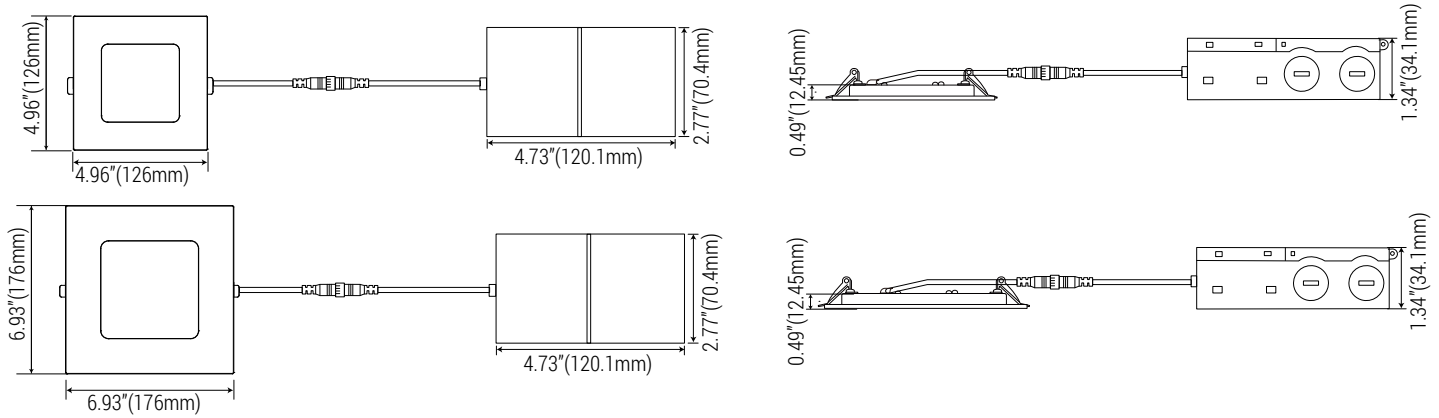

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)

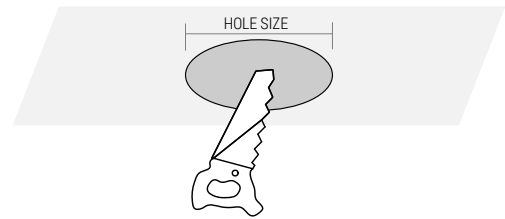


## STANDARD ACCESSORIES



J-Box driver



Connector



Hole cutout card

## ORDERING INFORMATION

**SB-4SSPL9W12-5CCT-W / SB-6SSPL12W12-5CCT-W**

SB	4	SSPL	9W	12	5CCT	W
COMPANY	SIZE	PRODUCT	POWER	VOLTAGE	CCT	FINISH
SB LED INC	4 (4inch) 6 (6inch)	LED Square Slim Panel Light	9W (9W) 12W (12W)	27 AC120V	5CCT 2700K/3000K 3500K/4000K 5000K	W - (White )

# Selectable LED Square Slim Panel Light



Wattages: (4")9W ; (6")12W

Easily flip the switch for desired CCT


Products view



## PHOTOMETRICS

For complete IES files, please visit our website.

### SB-4RSPL9W12-5CCT-W (9W&4000K)

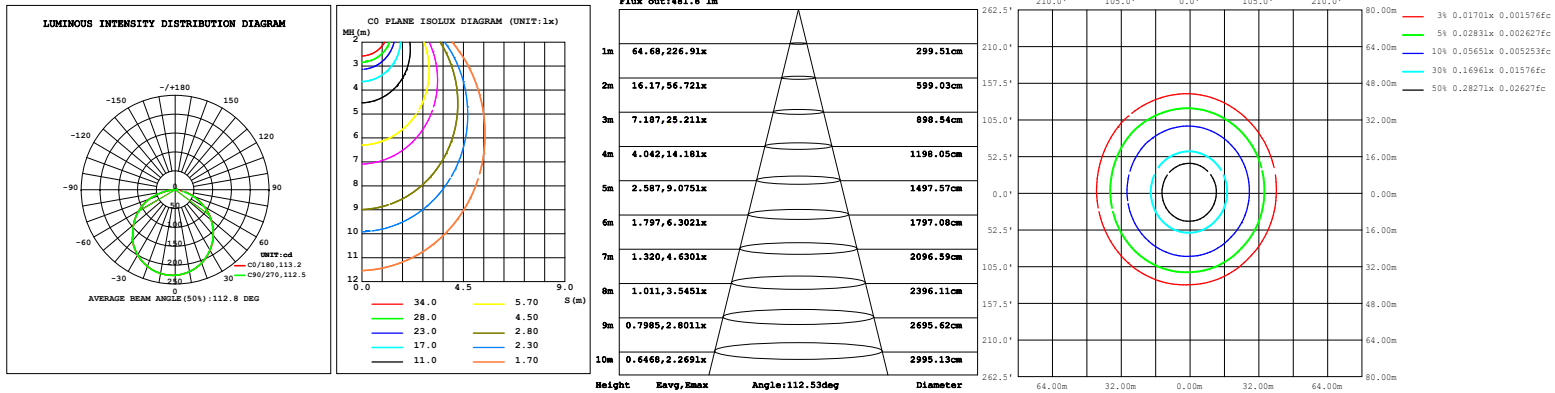

### SB-6RSPL12W12-5CCT-W (12W&4000K)

