

Selectable LED Slim Canopy Light



SNOWBALL
LIGHTING INCORPORATED



Wattages: 45W,65W,90W,110W



WATT/CCT
SELECTABLE

The Selectable LED Slim Canopy Light can be widely used for Indoor or Outdoor Excellent for Gas station, Hallways, Multipurpose Rooms , Underground parking,super market, store and many other applications.

Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.



Features:

- Lumileds LED, high luminous efficiency and long working life .
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design,high quality and better cooling for LED $T_j < 85^{\circ}\text{C}$.
- Excellent Optics design, greatly improve the light utilization and evenness.
- **The 0-10V Dimming type is continuous.**
- Motion sensor Control Available (SOLD SEPARATELY).

Packaging information:

❖ **SB-CP456590110W27-345K:**

Carton Size:390mmX340mmX335mm
15.35"X13.39"X13.19"(3Pcs/CTN)

Inside the box:320mmX320mmX115mm
12.60"X12.60"X4.53"

SPECIFICATION				
TYPE	SB-CP456590110W27-345K-D			
WATTAGE	45W	65W	90W	110W
LUMEN	7342 lm (45W&4000K)	11188 lm (65W&4000K)	14741 lm (90W&4000K)	17325 lm (110W&4000K)
EFFICACY	> 140 lm/W			
CCT	3000K,4000K,5000K			
CRI	> 70			
INPUT VOLTAGE	AC120-277V			
LIGHTING ANGLE	155°			
FACTORY SETTINGS	110W & 4000K			
LED TYPE	2835			
PF	> 0.95			
DRIVER EFFICIENCY	> 89%			
PROTECTION LEVEL	Wet location			
OPERATING TEMPERATURE	-40°F ~ 104°F			
LIFE TIME	> 50000 hours			
WARRANTY	5 year limited			

Selectable LED Slim Canopy Light




SNOWBALL
LIGHTING INCORPORATED



Wattages: 45W,65W,90W,110W



DIMENSION:

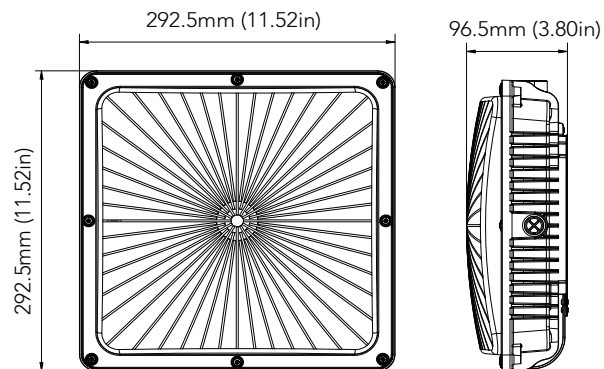

Specifications:

Shell materials: Aluminum & PC.
Net weight : 3.54Kg (7.8 lbs)
Finish: Dark Bronze(Standard)
Product Size:292.5mmX292.5mmX96.5mm
11.52"X11.52"X3.80"


Control Module:

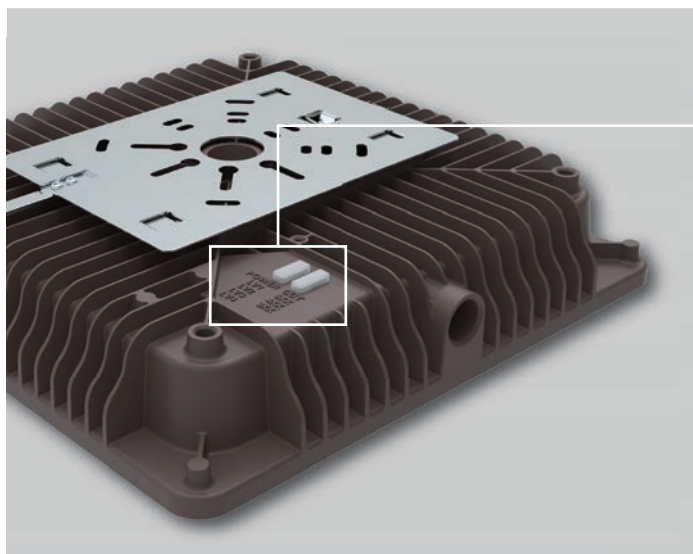

CCT AND WATTAGE SELECTABLE


This fixture has the function of adjusting the lumens output and color temperature on-site.

WATTAGE SELECT



Each model supports 4 positions
wattage regulation:
100%, 80%, 60%, 40%

CCT SELECT



Offer three CCT adjustable
(3000K, 4000K, 5000K) .

CONTROLS (SOLD SEPARATELY)



BRI810-B-M10
Microwave Motion Sensor



RC-100
Microwave Sensor Remote Controller

ORDERING INFORMATION:

EXAMPLE: SB-CP456590110W27-345K-Z[D,W,B,S]-Y[Blank,P]-E[Blank,M]

SB	CP	456590110W	27	345K	Z	Y	E
COMPANY	PRODUCT	POWER	VOLTAGE	CCT	FINISH	CONTROL	CONTROL
SB LED INC	CP Led Slim Canopy	456590110W 45W/65W 90W/110W	27 AC120-277V	345K 3000K/4000K/5000K	D (Dark Bronze) W (White) B (Black) S (Silvery)	P - (Photocell)	M Motion Sensor


Selectable LED Slim Canopy Light

Wattages: 45W,65W,90W,110W


PHOTOMETRICS:

For complete IES files, please visit our website.

SB-CP456590110W27-345K (110W&3000K)

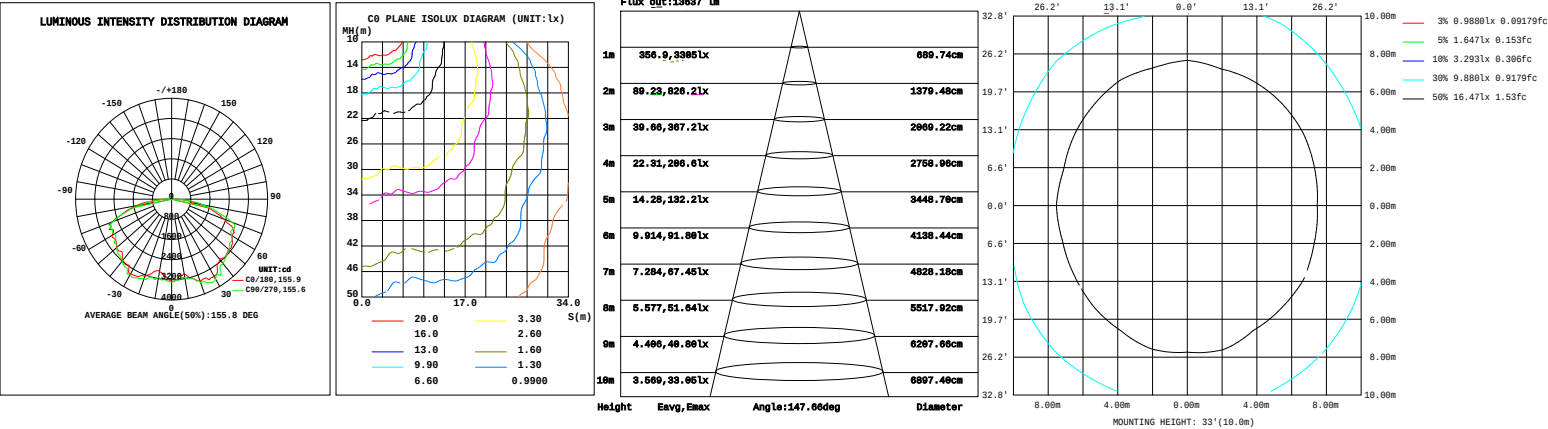

SB-CP456590110W27-345K (110W&4000K)

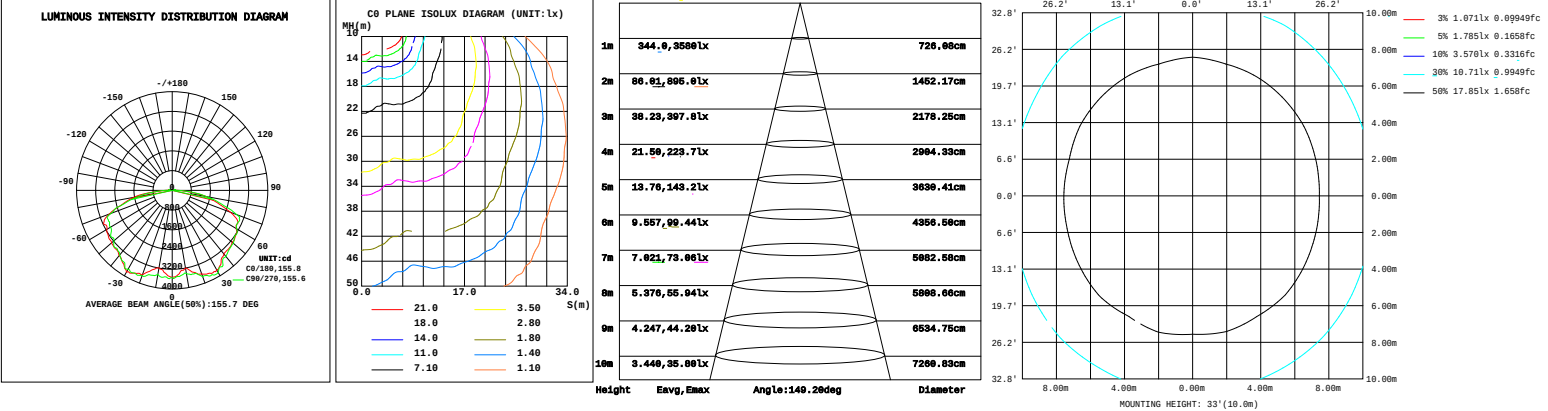

SB-CP456590110W27-345K (110W&5000K)

