

Selectable LED 5CCT Commercial Downlight



Wattages:(4")6W/9W/12W; (6")12W/17W/22W; (8")17W/24W/30W; (10")22W/30W/38W

Selectable LED Commercial Downlight can be widely used in indoor lighting (Wet location) suitable for office, indoor playground, Hotel, shop, indoor entertainment places, and other indoor place.



4 inch

6 inch

8 inch

10 inch



FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Mercury-free
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years manufacturer warranty
- Compatible with most Lutron and Leviton dimmers
- The 1-10V Dimming type is continuous

WATT/CCT
SELECTABLE

Selectable Wattage
Three position sliding switch
4inch: 6W/9W/12W
6inch: 12W/17W/22W
8inch: 17W/24W/30W
10inch: 22W/30W/38W

Selectable CCT
Three position sliding switch
2700K/3000K/3500K
4000K/5000K




SPECIFICATION				
TYPE	SB-4CDL6912W27-5CCT-W	SB-6CDL121722W27-5CCT-W	SB-8CDL172430W27-5CCT-W	SB-10CDL223038W27-5CCT-W
WATTAGE	6W/9W/12W	12W/17W/22W	17W/24W/30W	22W/30W/38W
LUMEN	628 lm/893 lm/1159 lm	1296 lm/1694 lm/2194 lm	1871 lm/2621 lm/3273 lm	2356 lm/3141 lm/3892 lm
EFFICACY	> 100 lm/W	> 100 lm/W	> 100 lm/W	> 100 lm/W
SIZE	4 inch	6 inch	8 inch	10 inch
CCT	2700K,3000K,3500K,4000K,5000K			
POWER FACTOR	> 0.9			
CRI	> 90			
INPUT VOLTAGE	AC120-277V			
LIGHTING ANGLE	70			
FACTORY SETTINGS	12W & 4000K	22W & 4000K	30W & 4000K	38W & 4000K
LED TYPE	2835			
CERTIFICATE	ETL Energy Star			
LIFE TIME	50000 hours			
PROTECTION LEVEL	Wet Location			
OPERATING TEMP	(-4°F~ 113°F) -20~45°C			
WARRANTY	5 year limited			

Selectable LED 5CCT Commercial Downlight



Wattages:(4")6W/9W/12W; (6")12W/17W/22W; (8")17W/24W/30W; (10")22W/30W38W

DIMENSION

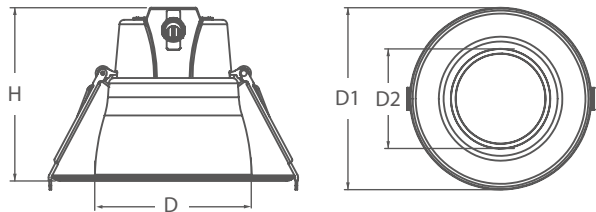


	H	D	D1	D2
4 inch	84 mm(3.31 inch)	Φ110 mm(Φ4.33 inch)	Φ130 mm(Φ5.12 inch)	Φ74.5 mm(Φ2.93 inch)
6 inch	105.6 mm(4.16 inch)	Φ152.7 mm(Φ6.01 inch)	Φ214 mm(Φ8.43 inch)	Φ119 mm(Φ4.69 inch)
8 inch	114.4 mm(4.5 inch)	Φ182.3 mm(Φ7.18 inch)	Φ255 mm(Φ10 inch)	Φ128.6 mm(Φ5.06 inch)
10 inch	124.5 mm(4.9 inch)	Φ215.5 mm(Φ8.48 inch)	Φ289 mm(Φ11.38 inch)	Φ141.5 mm(Φ5.57 inch)

WATTAGE	SB-4CDL6912W27-5CCT-W	SB-6CDL121722W27-5CCT-W	SB-8CDL172430W27-5CCT-W	SB-10CDL223038W27-5CCT-W
NT. WEIGHT	0.66 lbs	1.21 lbs	1.43 lbs	1.54 lbs
BOX DIM.	19.1" x 15.6" x 13.5" (24 Pcs/CTN)	19.0" x 15.6" x 19.1" (12 Pcs/CTN)	22.2" x 16.6" x 22.4" (12 Pcs/CTN)	23.8" x 13.0" x 13.0" (4 Pcs/CTN)

ACCESSORIES (ACCESSORIES NEED TO PURCHASED SEPARATELY)



SB-EML08W27-XX SB-EML15W27-XX
SB-EML20W27-XX
8W/15W/20W Emergency Backup Battery LED Driver

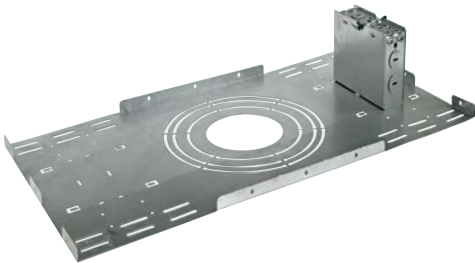

NAME	T-Grid
TYPE	CDL-T-Grid
FINISH	Silver
USE	New Construction or Remodel Plate for T-grid Ceilings Used for 4 ", 6 ", 8 ", 10 " Leds Installation of COMMERCIAL DOWNLIGHT



NAME	Trim
TYPE	TRIM-4-B-G2 TRIM-6-B-G2 TRIM-8-B-G2 TRIM-10-B-G2
FINISH	Black
SIZE	6inch/8inch/10inch
USE	Used for 6 ", 8 ", 10 " Leds Installation of COMMERCIAL DOWNLIGHT



NAME	Trim
TYPE	TRIM-4-S-G2 TRIM-6-S-G2 TRIM-8-S-G2 TRIM-10-S-G2
FINISH	Silver
SIZE	6inch/8inch/10inch
USE	Used for 6 ", 8 ", 10 " Leds Installation of COMMERCIAL DOWNLIGHT



NAME	Trim
TYPE	TRIM-4-U-G2 TRIM-6-U-G2 TRIM-8-U-G2 TRIM-10-U-G2
FINISH	Brown
SIZE	6inch/8inch/10inch
USE	Used for 6 ", 8 ", 10 " Leds Installation of COMMERCIAL DOWNLIGHT

Selectable LED 5CCT Commercial Downlight




Wattages:(4")6W/9W/12W; (6")12W/17W/22W; (8")17W/24W/30W; (10")22W/30W38W

ORDERING INFORMATION

EXAMPLE:


SB-4CDL6912W27-5CCT-W / 6CDL121722W27-5CCT-W / SB-8CDL172430W27-5CCT-W / SB-10CDL223038W27-5CCT-W

SB	6	CDL	121722W	27	5CCT	W
COMPANY	SIZE	PRODUCT	POWER	VOLTAGE	CCT	FINISH
SB LED INC	4 (4inch) 6 (6inch) 8 (8inch) 10 (10inch)	LED COMMERCIAL DOWNLIGHT	6912 (6W/9W/12W) 121722 (12W/17W/22W) 172430 (17W/24W/30W) 223038 (22W/30W/38W)	27 AC120-277V	5CCT 2700K/3000K 3500K/4000K 5000K	W - (White)

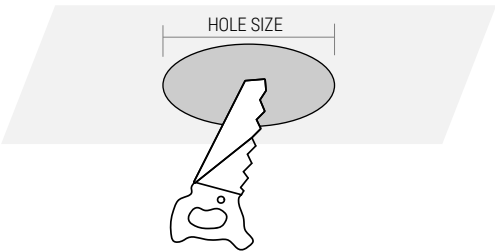

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64" (160mm)
8inch	8 5/64"(205mm)
10inch	8 31/32"(228mm)

ACCESSORIES (Standard)



Hole cutout card




Wire nuts

PHOTOMETRICS

For complete IES files, please visit our website.

SB-4CDL6912W27-5CCT-W(22W&4000K)

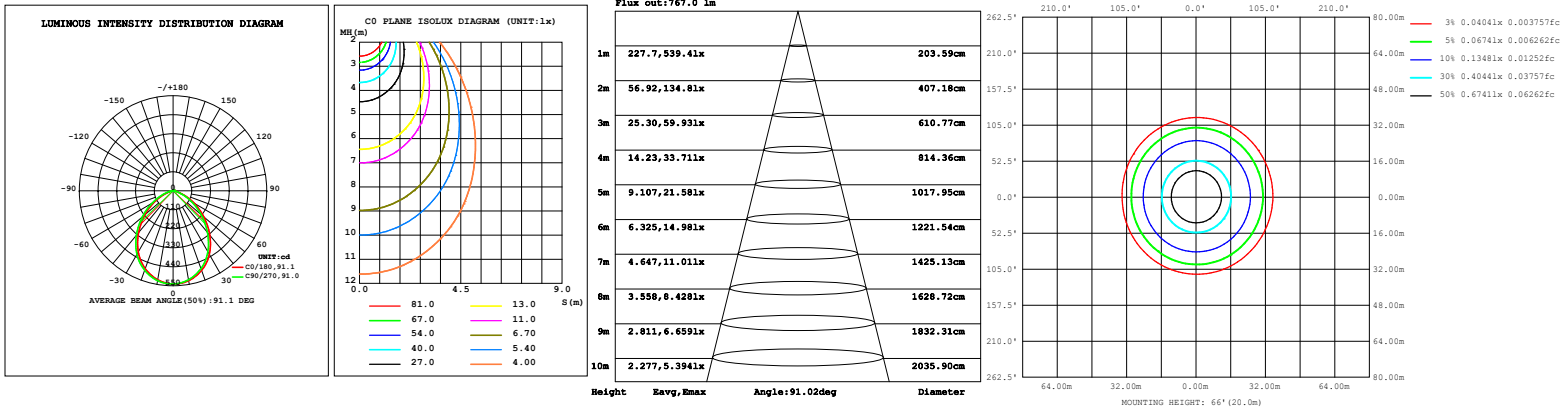

Selectable LED 5CCT Commercial
Downlight


SNOWBALL
LIGHTING INCORPORATED

Wattages:(4")6W/9W/12W; (6")12W/17W/22W; (8")17W/24W/30W; (10")22W/30W38W


PHOTOMETRICS

For complete IES files, please visit our website.

SB-6CDL121722W27-5CCT-W(22W&4000K)

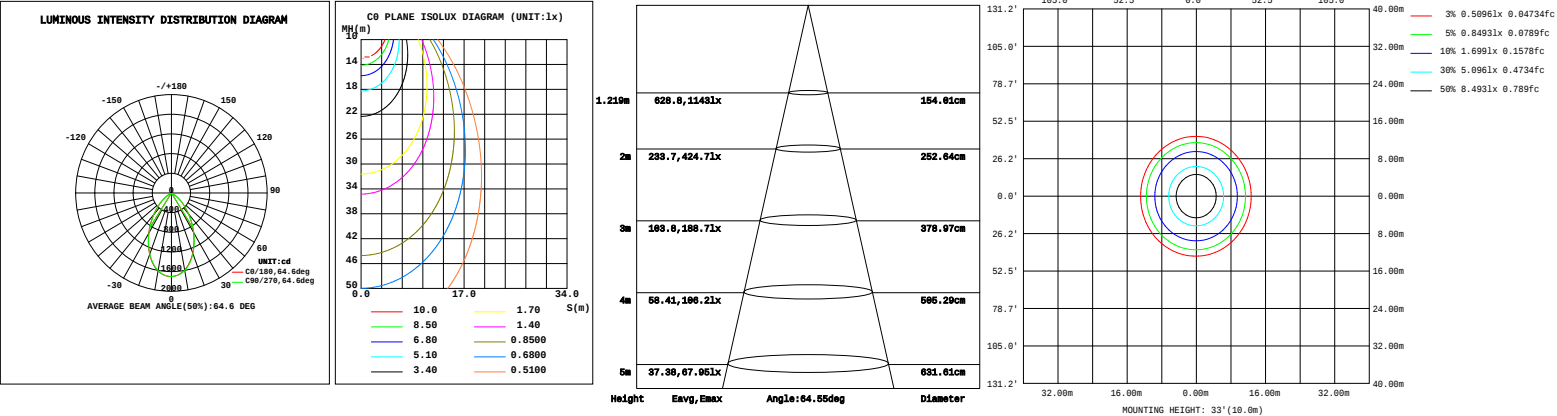

SB-8CDL172430W27-5CCT-W (30W&4000K)

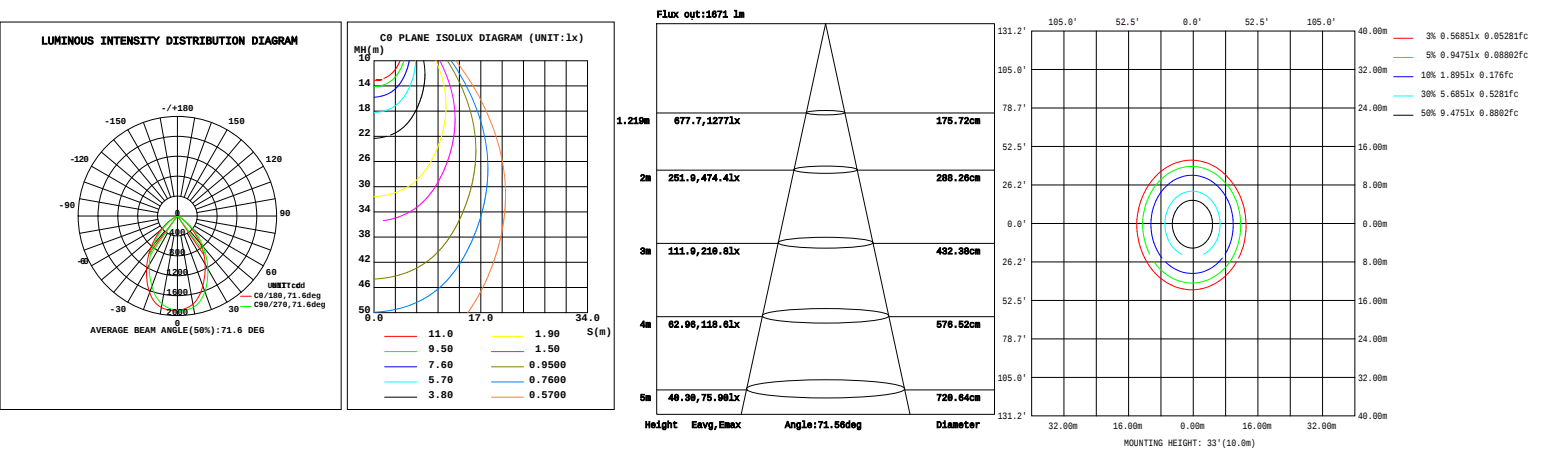

SB-10CDL223038W27-5CCT-W(38W&4000K)

