





30W 35W

Tunable LED Wrapround Light

Wattage & CCT Field Adjustable

PRODUCT FEATURES:





• Sheet iron design, better cooling, light quality, LED Tj $< 85^{\circ}$ C.

❖ The 0-10V Dimming type is continuous.

❖ 42V PCB output voltage.Motion Sensor

Motion Sensor (Optional)

❖ 12Vdc auxiliary.

Additional Information:


Input: AC 120-277V

CCT: 3500K/4000K/5000K

Light Source: SEOUL

Driver: SIMON POWER













PRODUCT APPLICATIONS:

The Tunable Wraparound LED Lighting Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms, Office Buildings, Conference Rooms, super market, store and many other applications.

Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.

Specifications

Wrapround-4FT

Length:1211.8MM(47.7'') Width: 180MM(7.1'') Depth:71MM(2.8'')

Weight: 7.94 (lbs)

Packaging information

❖ Inside the box:1235MMX186MMX76MM

48.6"X7.32"X3"

carton: 1250MMX326MMX207MM(A case of four)

49.2"X12.83"X8.15"

Mounting

Surface Mounting.

| 1211.8/47.7" | | | | |
|--------------|--|---|--|--|
| | | | | |
| | | Ī | | |
| | | | | |
| | | | | |
| | | ł | | |





30W 35W 40W


Tunable LED Wrapround Light


Wattage & CCT Field Adjustable

TECHNICAL PARAMETERS:

| Туре | RP4FT303540W-3545K-E-G2 | | | | | |
|----------------------|---------------------------|-------------------------|-------------------------|--|--------------|--|
| Power | 30W/35W/40W | Lighting Angle | 101° | | | |
| Input Voltage | AC120-277V | LED Brightness Decay | <5%/6000 hrs | | <5%/6000 hrs | |
| PF | >0.98 | Working Life | >75000 hrs | | | |
| Driver Efficiency | >90% | Working Temperature | -20 - +50℃ | | | |
| Luminous Flux | 4110Lm / 4690Lm / 5240 Lm | Storage Temperature | -20 -+50℃ | | | |
| Color Temperature | 3500K/4000K/5000K | Protection Level | Damp | | | |
| CRI | Ra>80 | Cable | Input Connect, No Cable | | | |
| Factory Setting | Power:40W | Color Temperature:4000K | | | | |

PHOTOMETRY:

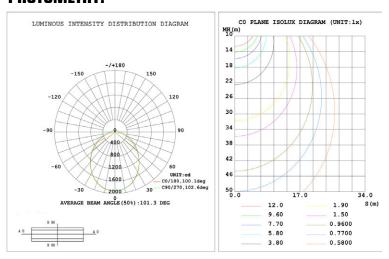



ORDERING EXAMPLE:RP4FT303540W-3545K-E [Blank,M]-G2

| RP | 4FT | 303540W | 3545K | E |
|-----------------------------------|---------------------|----------------------------------|---|-----------------------------|
| Product | Size | Power | ColorTemp | CONTROL |
| RP Led Wraparound Light | 4 FT (4feet) | 30W(30W) 35W(35W) 40W(40W) | 35K (3500K) 4K (4000K) 5K (5000K) | M (Motion Sensor) |





Tunable LED Wrapround Light Wattage & CCT Field Adjustable

30W 35W **40W**

EMERGENCY BACK-UP (SOLD SEPARATELY)



SB-EMS8W27-XX

8W Emergency Backup Battery LED Driver

SB-EMS15W27-XX

15W Emergency Backup Battery LED Driver

SB-EMS20W27-XX

20W Emergency Backup Battery LED Driver

CONTROL (SOLD SEPARATELY)



ANT-3C





RC-100 Microwave Sensor Remote Controller

Control Module:



Adjust the switch

The Tunable LED WRAPAROUND LIGHT can adjust the power and color temperature of the whole lamp, which is convenient and fast. The power and color temperature can be selected according to the actual needs of customers. For example, if I want 35W power and 4000K color temperature, you need to shift the dial code switch to the middle position of the switch Greatly, meet the needs of customers.





