

# 5CCT Selectable LED Wraparound Light



**SNOWBALL**  
LIGHTING INCORPORATED



**Wattages: (2FT)12W / 16W / 20W / 25W ; (4FT)24W / 31W / 38W / 46W**



Selectable LED Wraparound Light provides gasketed enclosure which provides dust-free and moisture-free fixture. LED Wraparound Light Series can be widely used for food processing plants, meat lockers, beverage coolers, car washes, and parking structures.

Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.



## FEATURES

- Made of high quality ABS material, high ignition point, more safe.
- High efficiency LED Driver.
- Optical design, greatly improved the light utilization and evenness.
- 0-10V dimming.
- 12Vdc auxiliary
- Motion sensor control available (optional)

**WATT/5CCT**  
**FIELD-ADJUSTABLE**

Simply select desired CCT and Wattage before installation



## SPECIFICATION

| TYPE                | SB-RP2FT12162025W27-5CCT              | SB-RP4FT24313846W27-5CCT              |
|---------------------|---------------------------------------|---------------------------------------|
| WATTAGE             | 12W/16W/20W/25W                       | 24W/31W/38W/46W                       |
| LUMEN               | 1500 lm / 2000 lm / 2500 lm / 3000 lm | 3000 lm / 3800 lm / 4500 lm / 5500 lm |
| EFFICACY            | ≥ 120 lm/W                            |                                       |
| CCT                 | 3000K/3500K/4000K/5000K/6500K         |                                       |
| CRI                 | 80                                    |                                       |
| INPUT VOLTAGE       | AC120-277V                            |                                       |
| LIGHT ANGLE         | 100°                                  |                                       |
| POWER FACTOR        | 0.90                                  |                                       |
| DRIVER EFFICACY     | 88%                                   |                                       |
| FACTORY SETTINGS    | 25W & 4000K                           | 46W & 4000K                           |
| WORKING TEMPERATURE | -40°F ~ 104°F                         |                                       |
| LIFESPAN (L70)      | 100000 hours                          |                                       |
| PROTECTION LEVEL    | Damp                                  |                                       |
| CABLE               | None                                  |                                       |
| WARRANTY            | 5 year limited                        |                                       |

# 5CCT Selectable LED Wraparound Light




**SNOWBALL**  
LIGHTING INCORPORATED



**Wattages: (2FT)12W / 16W / 20W / 25W ; (4FT)24W / 31W / 38W / 46W**

## DIMENSION

Unit: inch(mm)

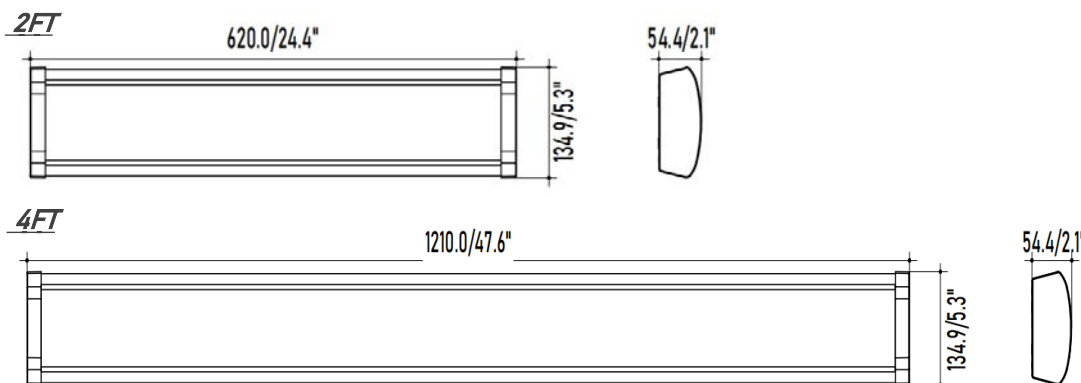

|                   |                              |
|-------------------|------------------------------|
| <b>WATTAGE</b>    | 12W/16W/20W/25W              |
| <b>NET WEIGHT</b> | 1.1KG(2.43lbs)               |
| <b>BOX DIM.</b>   | 25.28"x5.71"x2.48"(1pcs/CTN) |

|                   |                              |
|-------------------|------------------------------|
| <b>WATTAGE</b>    | 24W/31W/38W/46W              |
| <b>NET WEIGHT</b> | 2.0KG(4.41lbs)               |
| <b>BOX DIM.</b>   | 48.58"x5.71"x2.48"(1pcs/CTN) |

## EMERGENCY BACK-UP (SOLD SEPARATELY)



**SB-EMS8W27-XX**  
8W Emergency Backup Battery  
LED Driver

**SB-EMS15W27-XX**  
15W Emergency Backup Battery  
LED Driver

**SB-EMS20W27-XX**  
20W Emergency Backup Battery  
LED Driver

## CONTROL (SOLD SEPARATELY)



**ANT-15P**  
PIR sensor



**RC-100**  
Microwave Sensor  
Remote Controller

## ORDERING INFORMATION

EXAMPLE:

**SB-RP2FT12162025W27-5CCT-E[Blank,M] / SB-RP4FT24313846W27-5CCT-E[Blank,M]**

| <b>SB</b>                  | <b>RP</b>                           | <b>12162025W</b>                                                                   | <b>27</b>              | <b>5CCT</b>                                          | <b>E</b>                   |
|----------------------------|-------------------------------------|------------------------------------------------------------------------------------|------------------------|------------------------------------------------------|----------------------------|
| PRODUCT                    | PRODUCT                             | WATTAGE                                                                            | VOLTAGE                | CCT                                                  | CONTROL                    |
| <b>SB</b><br>(WSD LED INC) | <b>RP</b> (LED Wraparound<br>Light) | <b>12162025W -</b><br>(12W/16W/20W/25W)<br><b>24313846W -</b><br>(24W/31W/38W/46W) | <b>27 -</b> (120-277V) | <b>5CCT -</b><br>(3000K/3500K/4000K<br>/5000K/6500K) | <b>M -</b> (Motion Sensor) |

# 5CCT Selectable LED Wraparound Light



**SNOWBALL**  
LIGHTING INCORPORATED




Wattages: (2FT)12W / 16W / 20W / 25W ; (4FT)24W / 31W / 38W / 46W

## PHOTOMETRICS

For complete IES files, please visit our website.

### SB-RP2FT12162025W27-5CCT (25W&4000K)

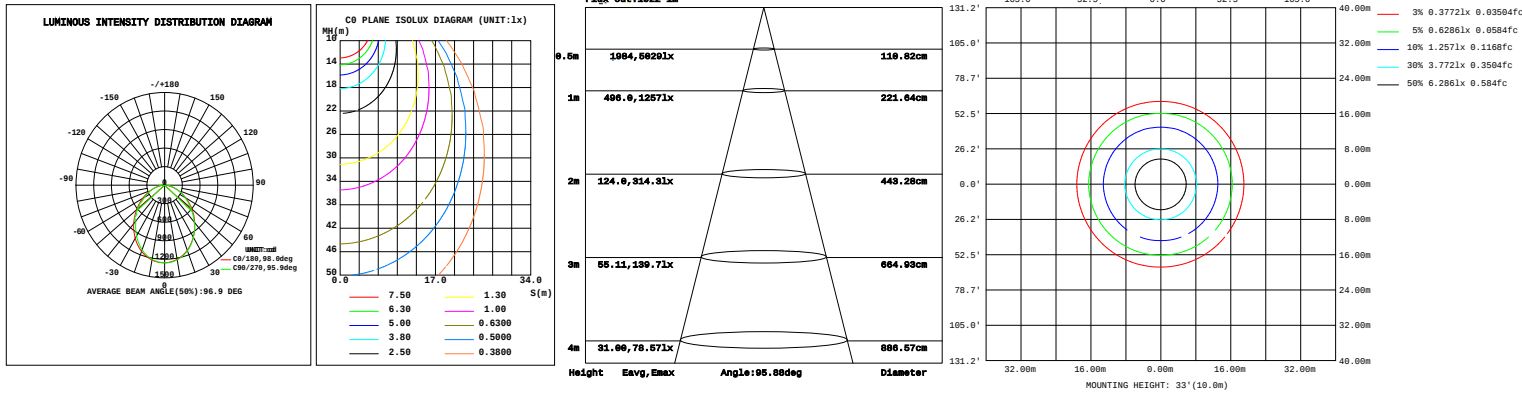

### SB-RP4FT24313846W27-5CCT (46W&4000K)

