


LED Selectable Strip Linear Light



SNOWBALL
LIGHTING INCORPORATED



Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W

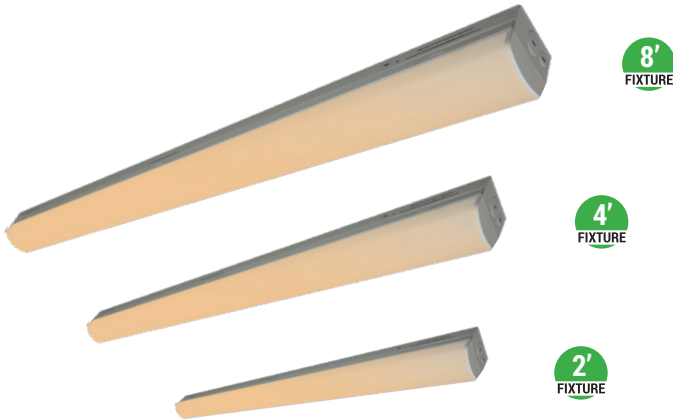

The Selectable Strip Linear Light can be widely used for indoor (damp locations) Excellent for hospitals,schools,shops,restaurants,storage rooms, supermarkets, etc.



FEATURES

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- Lens made of acrylic material (PMMA).
- 12Vdc auxiliary dimming
- Motion sensor control available (Optional)

WATT/CCT FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation



Buckle design, Convenient disassembly and assembly


SPECIFICATION				
TYPE	SB-ST2FT152025W27-3545K DLC Premium	SB-ST4FT253040W27-3545K DLC Premium	SB-ST8FT556065W27-3545K DLC Premium	SB-ST8FT657591W27-3545K DLC Premium
WATTAGE	(2FT) 15W/20W/25W	(4FT) 25W/30W/40W	(8FT) 55W/60W/65W	(8FT)65W75W/91W
LUMEN	2285 lm/3077lm/3719lm	3806 lm/4653lm/6100lm	8595 lm/9190 lm/9677 lm	10380lm/11978lm/13409lm
EFFICACY	≥130 lm/W			
CCT	3500K/4000K/5000K			
DEFAULT SETTING	25W&4000K	40W&4000K	65W&4000K	91W&4000K
CRI	80			
INPUT VOLTAGE	AC120-277V			
LIGHT ANGLE	112°			
POWER FACTOR	0.90			
DRIVER EFFICACY	86%			
DIMMING	0-10V Dimming			
WORKING TEMPERATURE	-4°F ~ 122°F			
LIFESPAN (L70)	100,000 hours			
PROTECTION LEVEL	Damp locations			
CABLE	NO CABLE			
WARRANTY	5 year limited			

LED Selectable Strip Linear Light

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W

DIMENSION

Unit:mm/inch

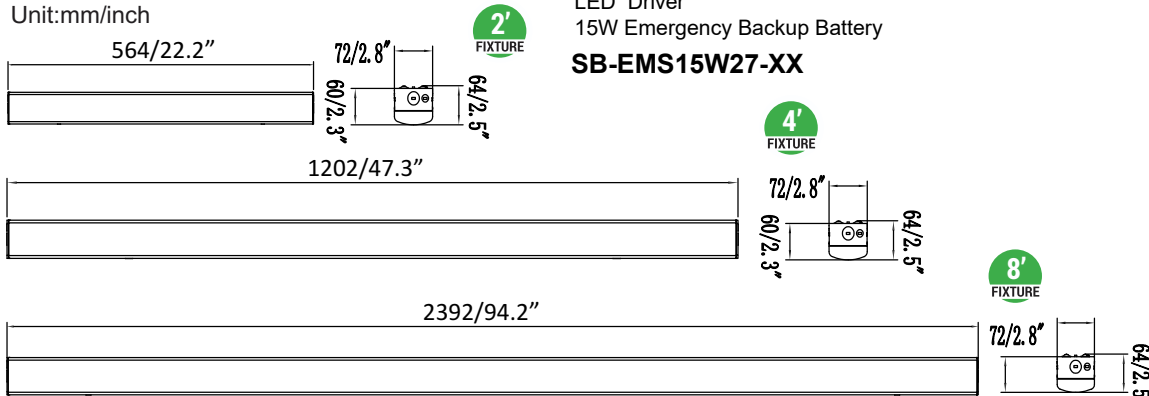

LED Driver
15W Emergency Backup Battery

SB-EMS15W27-XX

WATTAGE	15W/20W/25W
GR. WEIGHT	2.65 lbs (6 pcs/carton)
BOX DIM.	25.63" x 9.84" x 5.98"

WATTAGE	25W/30W/40W
GR. WEIGHT	4.41 lbs (6 pcs/carton)
BOX DIM.	50.59" x 9.84" x 5.98"

WATTAGE	55W/60W/65W/75W/91W
GR. WEIGHT	8.49 lbs (4 pcs/carton)
BOX DIM.	98.03" x 6.89" x 5.91"

EMERGENCY BACK-UP (SOLD SEPARATELY)



SB-EMS8W27-XX
8W Emergency Backup Battery
LED Driver

SB-EMS15W27-XX
15W Emergency Backup Battery
LED Driver

SB-EMS20W27-XX
20W Emergency Backup Battery
LED Driver

CONTROL (SOLD SEPARATELY)



NLC-MW-SQ-005
Microwave Motion Sensor



RC-100
Microwave Sensor
Remote Controller

STANDARD ACCESSORIES(Standard)



1.2M CABLE
(2FT,4FT,8FT)



J-BOX COVER
(2FT,4FT,8FT)



V-HOOK
(2FT,4FT,8FT)


STANDARD ACCESSORIES(Sold Separately)



SB-ST-SMA
Surface Mount Accessories
for Strip lights
(2FT,4FT,8FT)



SB-ST-CROSS PIECE
Strip light Connection
Piece
(2FT,4FT,8FT)



SB-ST-WG-2FT
SB-ST-WG-4FT
WIRE GUARD
8FT Strip Light
SB-ST-WG-4FT(2PCS)

ORDERING INFORMATION

EXAMPLE:

SB-ST2FT152025W27-3545K-E[Blank,M]/SB-ST4FT253040W27-3545K-E[Blank,M]/SB-ST8FT556065W27-3545K-E[Blank,M]

SD	ST	2FT	152025	27	3545K	E
PRODUCT	PRODUCT	SIZE	WATTAGE	VOLTAGE	CCT	CONTROL
SB(SB LED INC)	ST (Strip Linear Light)	2FT (2-foot)	152025W - (15W/20W/25W)	27 - (120-277V)	3545K - (3500K/4000K/5000K)	M(Motion Sensor)
		4FT (4-foot)	253040W - (25W/30W/40W)			
		8FT (8-foot)	556065W - (55W/60W/65W)			
			657591W - (65W/75W/91W)			

PRODUCT

LED Selectable Strip Linear Light




Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W


PHOTOMETRICS

For complete IES files, please visit our website.


SB-ST4FT253040W27-3545K (40W&3500K)

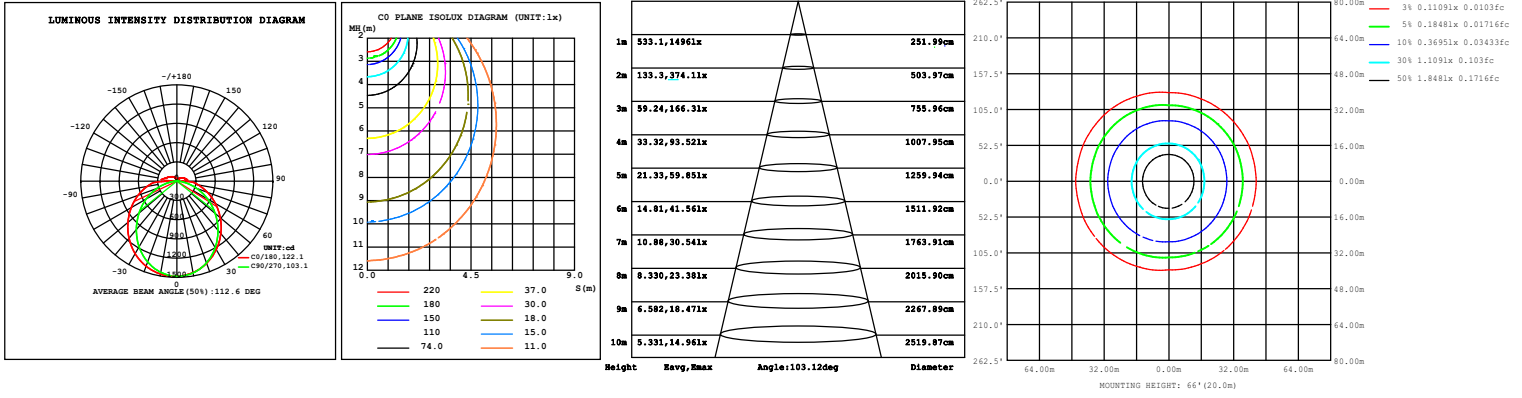

SB-ST4FT253040W27-3545K (40W&4000K)

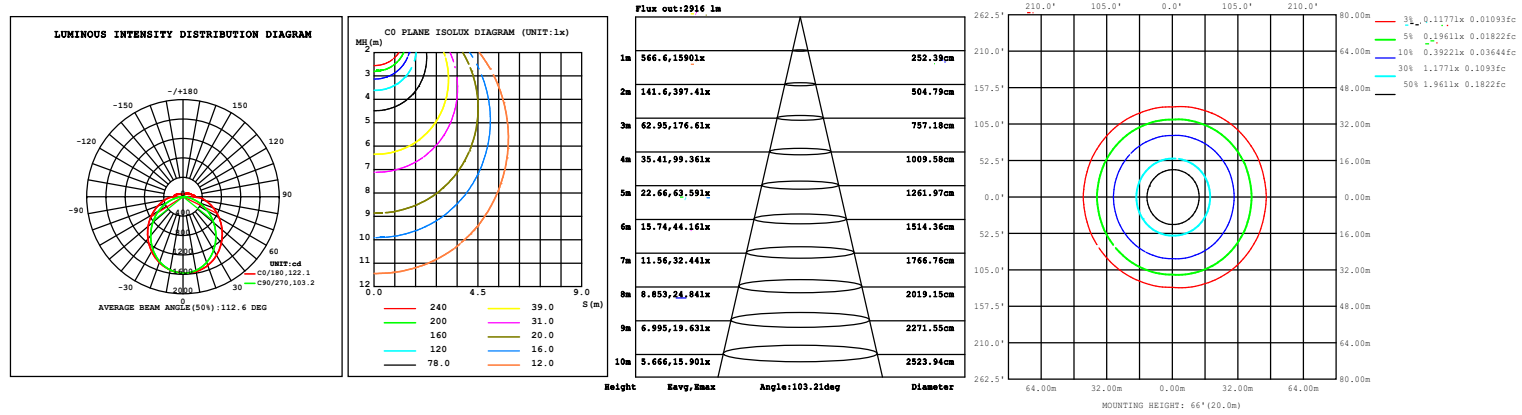

SB-ST4FT253040W27-3545K (40W&5000K)

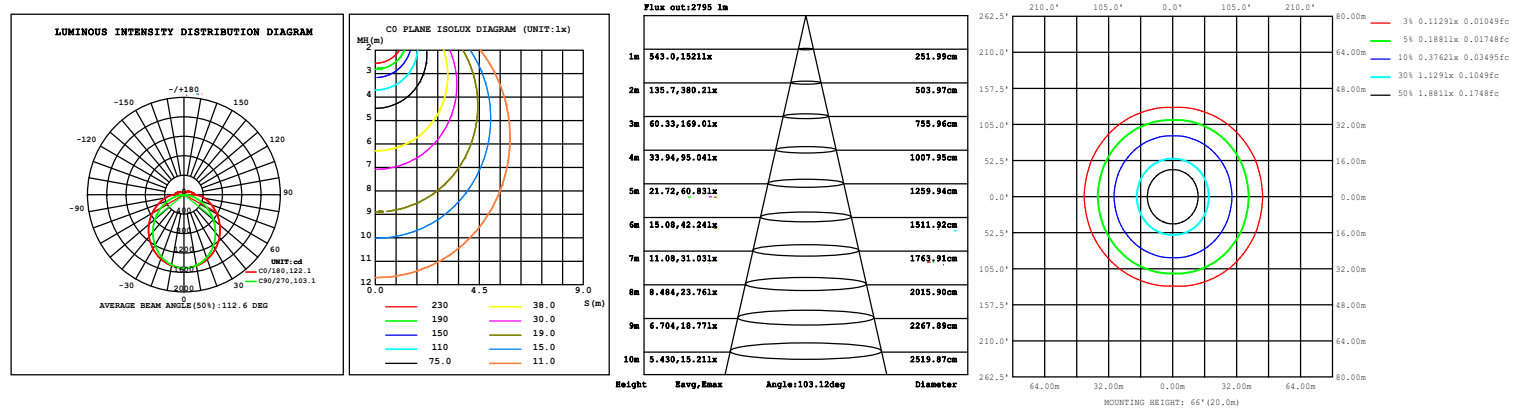

LED Selectable Strip Linear Light




Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS

For complete IES files, please visit our website.

SB-ST8FT556065W27-3545K (65W&3500K)

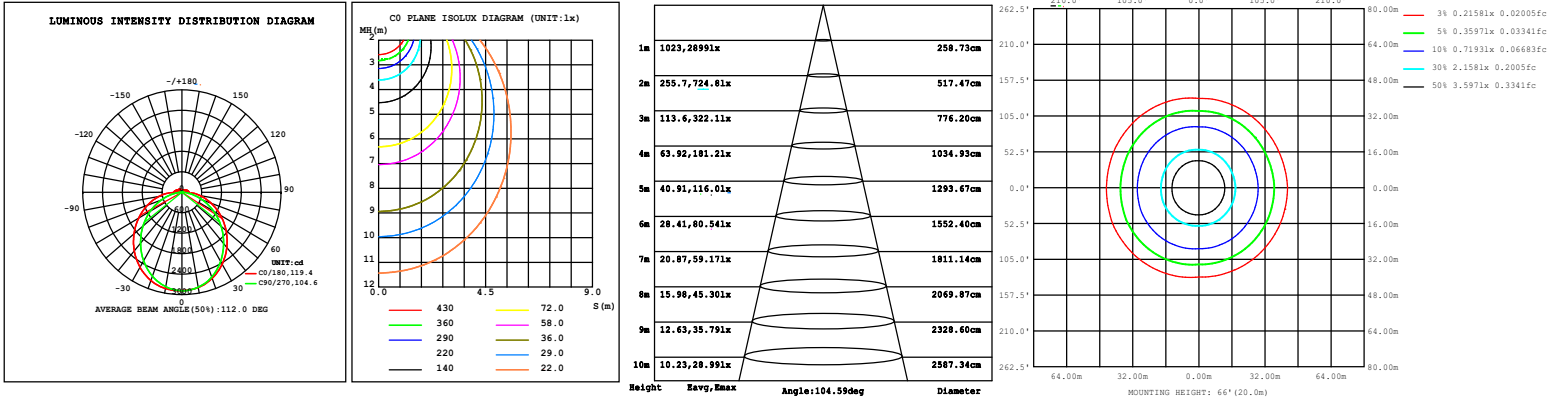

SB-ST8FT556065W27-3545K (65W&4000K)

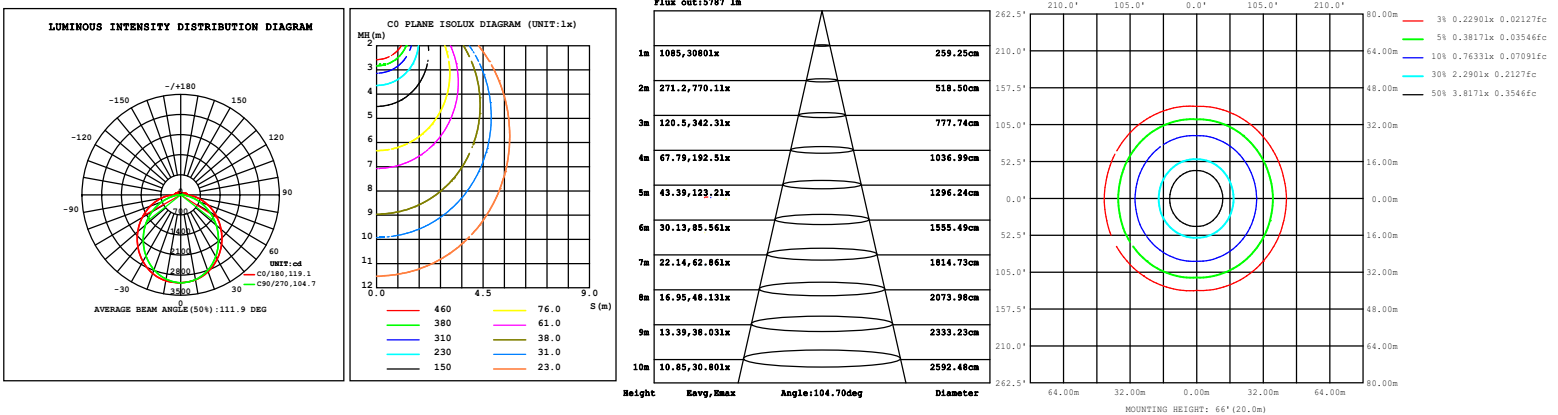

SB-ST8FT556065W27-3545K (65W&5000K)

