




LED Exit Sign and Emergency Light Combo

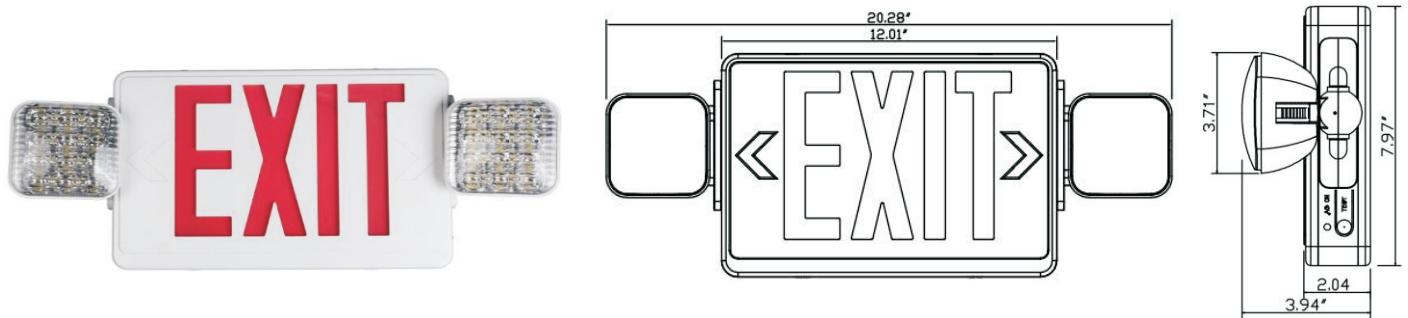

FEATURES

- High impact flame retardant high thermos and color stable UL 94-5VA rated polycarbonate
- Snap-fit construction to enable fast installation
- Perfect option for applications requiring an Exit sign and emergency light in the same area
- Wall or top mounted

ELECTRICAL

- UL924 Listed
- UL Damp Location Rated
- Dual 120/277 voltage. Optional multi-tap voltage available
- 2 x 2.2W LAMP HEADS SMD 2835 LEDs
- Built-in 9.6V700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator

SPECIFICATION

Model No.	HY-EXLCOMBOIRD
Voltage	120/277v 60 Hz
Finish	White Finish / Red Sign
Emergency Time	90 Minutes with 6.0V Ni-Cad Battery
Lumens	247 lm
Wattage	3.0W@ 120v; 3.7W@ 277V
Operating Temperature	32°F ~ +104°F / 0°C ~ +40°C
Package Info	20.1x12.4x17.1
PC/ Master Pack	6 PCS
Weight	25 LB