


LED Single Ring Flush Mount Ceiling Light



Certification



Feature

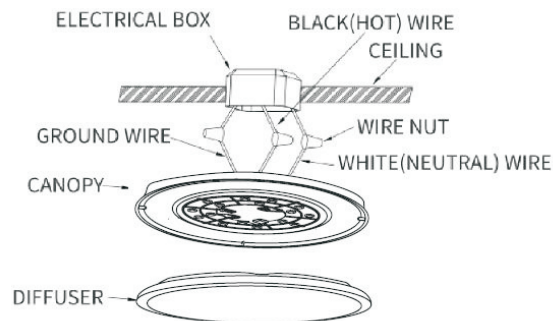

Application: Perfect for ceiling or wall mount applications. These flush mount ceiling lights mount directly to a junction box ideal for Residential and commercial applications

Ordering Guide

HY-FM 13-16W CCT-NK

HY: Company Code

FM: Flush Mount Ceiling Light

Size: 13-16W
15-22W
20-26W

CCT: 2700K-3000K-3500K-4000K-5000K Selectable

Finish: **NK:** Brushed Nickel
BK: Matt Black
GD: Brushed Gold

Specifications

Model	HY-FM13-16WCCT-XX	HY-FM15-22WCCT-XX	HY-FM20-26WCCT-XX
Wattage	16W	22W	26W
Size	13"	15"	20"
Lumen Output	1280 lm	1760 lm	2080 lm
Input Voltage	AC120V		
CCT	2700K-3000K-3500K-4000K-5000K Selectable		
Beam Angle	120°		
CRI	Ra>80		
Working Temperature	~4°F ~+113°F / ~20°C ~+40°C		
Lens	White Acrylic		
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours		
Finish	XX: NK: Brushed Nickel / BK: Matt Black / GD: Brushed Gold		
PCS/BOX	6	6	6
Master Box Dimension	525X365X365mm 20.67"x14.37"x14.37"	525X415X415mm 20.67"x16.34"x16.34"	585X510X510mm 23.03"x20.08"x20.08"
Master Box Weight	5.62kg/12.39lbs	7kg/15.43lbs	10.8kg/23.81lbs




LED Single Ring Flush Mount Ceiling Light

Dimension

Front View

Side View





Model No.	HY-FM13-16WCCT-NK HY-FM13-16WCCT-BK HY-FM13-16WCCT-GD	HY-FM15-22WCCT-NK HY-FM15-22WCCT-BK HY-FM15-22WCCT-GD	HY-FM20-26WCCT-NK HY-FM20-26WCCT-BK
Size			
L1	φ 330mm / 12.99"	φ 390mm / 15.35"	φ 490mm / 19.29"
L2	65mm / 2.56"	65mm / 2.56"	65mm / 2.56"

Operating Guide

1 CCT Adjustable

2 Wiring Guide

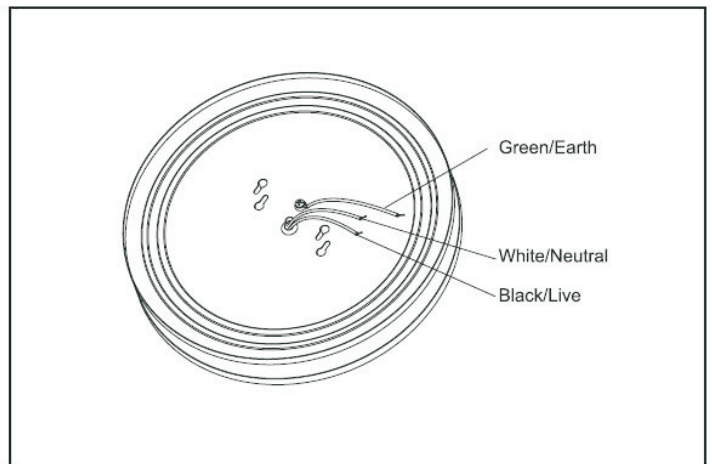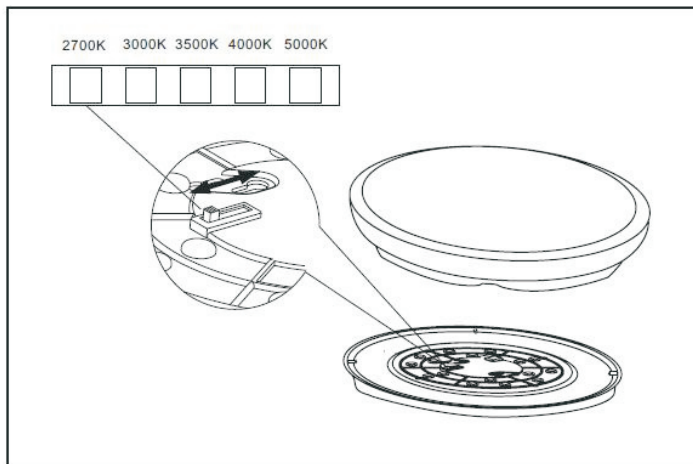

Photometrics

16" LIGHT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

VERTICAL EQUILUMINOUS CURVE

