


WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification and/or electrical shock this product is forbidden as it may cause personal injury, death
- propertydamage and/or product malfunction.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 50°C (-40°F to 122°F)
- MIN 75°C SUPPLY CONDUCTORS.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.



Mounting Bracket

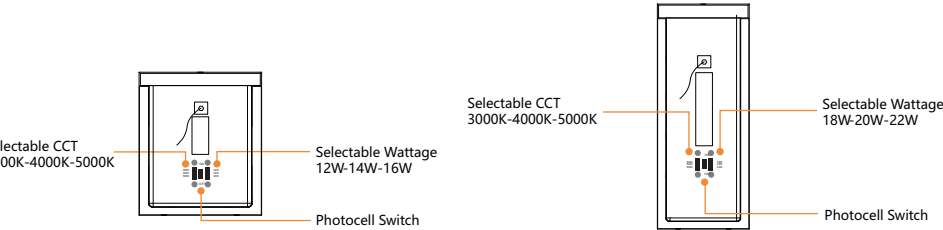


Dimensions

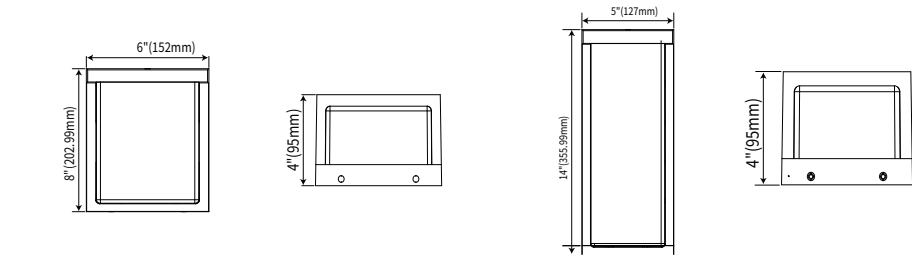

Installation Method A

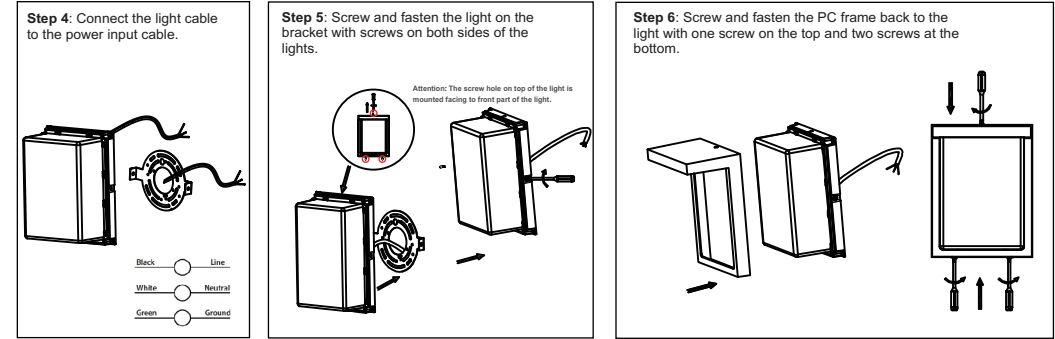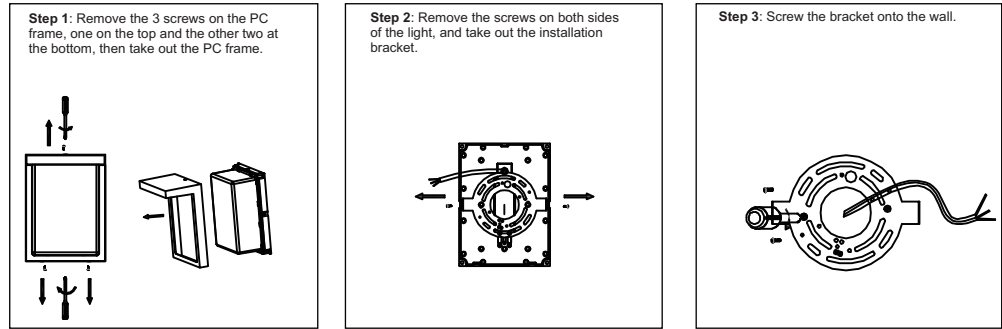

Installation Method B

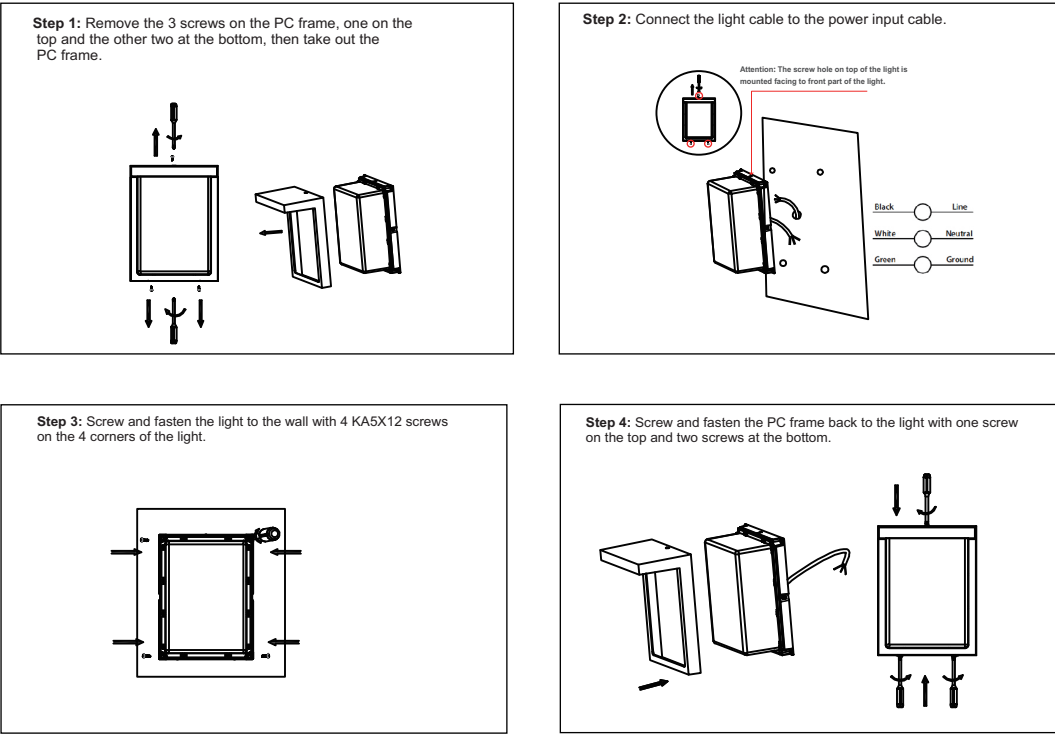

MODEL	PACKING SIZE	PCS/CTN	N.W	G.W	20GP	40HQ
MWP02-0864X-XX-XXXX(XX)	L515xW320xH225mm	10	6kg	6.9kg	8200	18200
MWP02-1454X-XX-XXXX(XX)	L515xW285xH375mm	10	7.6kg	8.3kg	5500	12200