SNOWBALL
LIGHTING INCORPORATED

SIGMALUX
COMMERCIAL LIGHTING

LED Track Light (TL04)



Support Halo/Juno exchangeable adapter.
90+CRI with 3-step MacAdam Ellipse.
High-Efficacy with precise Center Beam
Candle Power can pivot +/-90° vertically.

Recommended Application Retailers, Supermarkets,Restaurants, Shopping Mall, etc.

PRODUCT FEATURES:

- 95LPW & Triac dimming for CCT &wattage selectable.
- Daisy connection with very convenient replacement in 1minute.
- Single voltage: AC120V.
- Available with suspending installation and surface-mounted installation.
- 20°-50°Beam Angle for variety choices.
- 5 years warranty.

SPECIFICATION		
MODEL	SB-TL04-20W-TCP	SB-TL04-30W-TCP
WATTAGE	20/15/10W Tunable	30/25/20W Tunable
LUMENS	1974LM(Max)	2905LM(Max)
CCT	2700K/3000K/3500K/4000K/5000K Tunable	
CRI	Ra >90	
INPUT VOLTAGE	AC120V	
DISTRIBUTION	20-50° Zoomable	
POWER FACTOR	>0.9	
DRIVER EFFICACY	>87%	
LIFE SPAN	>50,000 hrs	
WORKING TEMPERATURE	-40°F~104°F	
STORAGE TEMPERATURE	-40°F~176°F	
WARRANTY	5 years limited	

SNOWBALL
LIGHTING INCORPORATED

SIGMALUX
COMMERCIAL LIGHTING

LED Track Light (TL04)

Adapter:

- Compatible with H-type track adapter, J-type track adapter, suitable for all your projects requirements.
- H type and J-type track adapter are interchangeable



Halo

"Halo" is Standard adapter with fixture

Juno

"Juno" is option adapter and sold seperately

Luminaire Arm:

- 180° tilt and 350° rotation adjustable



Beam angle:

- Zoomable track light heads 20° - 50° adjustable to meet different application requirements



Application:

- Recommended Use for Retailers, Supermarkets, Restaurants, Shopping Mall, Grocery, Hospitality, Commercial, Residential, Exhibit etc.


SNOWBALL
LIGHTING INCORPORATED

SIGMALUX
COMMERCIAL LIGHTING


LED Track Light (TL04)

PRODUCT DIMENSION:

20/15/10W

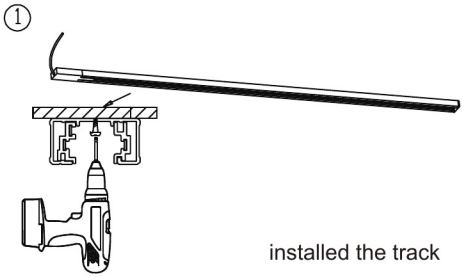


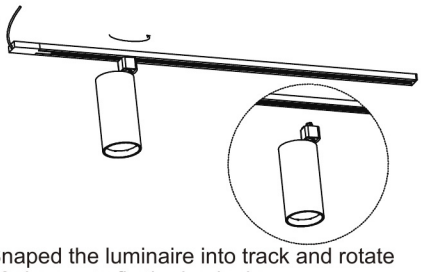
30/25/20W

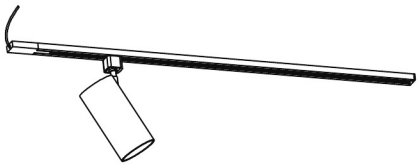


Power(Size)	Inner packing size (1 pcs/ctn)	N.W. (1pcs/ctn)	G.W. (1pcs/ctn)	Outer packing size	N.W.	G.W.	pcs/ctn
SB-TL04-20W-TCP	L4.17xW3.5xH10.2 inch L106xW89xH259 mm	1.5Lbs(0.68Kg)	1.7Lbs(0.77Kg)	L17.32xW10.63xH18.50 inch L440xW270xH470 mm	29.89Lbs(13.56Kg)	35.1Lbs(15.92Kg)	20
SB-TL04-30W-TCP	L4.13xW3.46xH11.54 inch L105xW88xH293 mm	2.4Lbs(1.09Kg)	2.65Lbs(1.20Kg)	L17.32xW12.32xH14.65 inch L440xW313xH372 mm	41.89Lbs(19.00Kg)	43.21Lbs(19.60Kg)	16

Track(Size)	Outer packing size (12pcs/ctn)	N.W. (12pcs/ctn)	G.W. (12pcs/ctn)
4FT TRACK	L49.02xW4.41xH3.15 inch L1245xW112xH80 mm	14.99Lbs(6.8Kg)	17.15Lbs(7.78Kg)
8FT TRACK	L97.05xW4.41xH3.15 inch L2465xW112xH80 mm	29.37Lbs(13.32Kg)	30.86Lbs(14Kg)

① 
installed the track

② 
Snaped the luminaire into track and rotate 90 degree to fix the luminaire

③ 
Adjust to proper angle, connect the mains supply

Other Installation Methods (Sold Seperately)


SUSPENSION KITS


MONOPOINT


SURFACE


PENDANT











TRACK PENDANT

SNOWBALL
LIGHTING INCORPORATED

SIGMALUX
COMMERCIAL LIGHTING

LED Track Light (TL04)

Optional accessories

Surface Mounted Track 	Live End Conduit Connector 	Input End Connector 	End Cap 	Conductive Connector 
Floating Canopy Feed 	Wire Flexible Connector 	T-Connector 	L-Connector 	"X" Connector 

ORDERING GUIDE:


EXAMPLE:

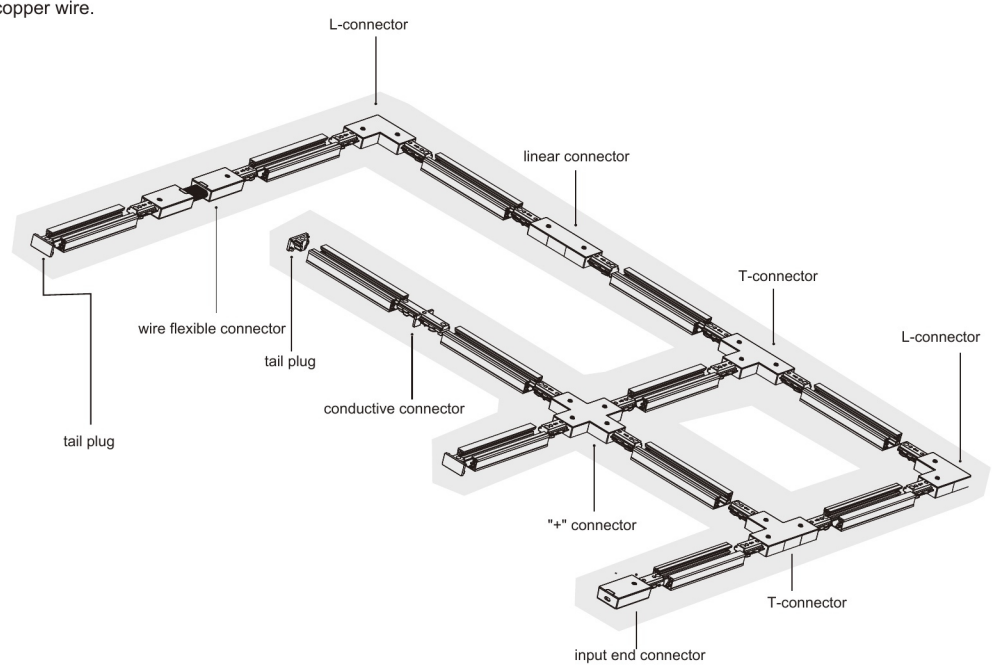
SB-TL04-20W-TCP-a-L-z

SB	TL04	20W	TCP	a	L	z
COMPANY	PRODUCT	POWER	Tunable CCT and Power	Beam Angle	Lens	Finish
Snowball	LED Track Light	20W=20/15/10W 30W=30/25/20W	2700K/3000K/3500K/ 4000K/5000K	20-50° Tunable		B=Black W=White

Rail system connection diagram:

Before installation, cut off the spring tab on one side of the ground wire connector and connect it effectively to the track's ground copper wire.





LED Track Light (TL04)

Applications

