Solar LED Street Light





Wattages: 48W



The working principle of solar LED street light: During the daytime, the solar street light is controlled by intelligent controller. The solar panel is irradiated by sunlight, absorbs the sun light and converts it into electric energy to charge the battery. At night, the battery pack provides power to supply the LED lighting to realize the illumination.

The DC controller can ensure that the battery pack is not damaged due to overcharging or overdischarging, meanwhile, it has temperature compensation and lightning protection, reverse polarity protection and other functions such as Light control plus time control, lighting in different time (can be preprogrammed different power in each time period) Intelligent lighting 3-5 rainy days.

Ideal for park,Roadway,Parking lot,Courtyard and many other applications.



PRECAUTION

- High luminous efficiency and long working life.
- A special solar controller is used.
- Osram light source chip is used.
- Monocrystalline silicon solar panel.
- Excellent optics design, greatly improve the light utilization and evenness.

	SPECIFICATION
ТҮРЕ	SB-SPST48W5-50K-D
WATTAGE	48W
LUMEN	3600 lm
CCT	5000K
CRI	80
POLAR PANELS	5V/50W/POLYCRYSTALLINE
BATTERY	3.2V/60AH
CHIP	OSRAM 3030
HEIGHT	6-8M (19.69-26.25FT)
LAMP SIZE	SOCKET 0.24X0.63 inch LIGHT SOURCE 0.91 inch
WORKING TIME	8H+1HMORNINGLGHT
CHARGING TIME	3-5H
CONTEOL TIME	LIGHT CONTRAL+TIME CONTROL
WORKING TEMPERATURE	-4°F ~ 122°F
CABLE	NO
OUTDOOR RATING	IP65
INNER DIAMETER OF LAMP HOLDER	φ65mm(2.56 inch)
WARRANTY	2 year limited

Solar LED Street Light





Wattages: 48W

DIMENSION




PACKAGING INFORMATION *SB-SPST48W5-50K-D

840MMX530MMX350MM(1Pcs/CTN) (33.07" X20.87" X13.78")

SPECIFICATIONS:

Shell materials: Aluminum & PC Net weight : 29.76 lbs Finish: Dark Bronze(Standard) Product Size:825 X 520 X 370(mm) 32.48"X20.47"X14.57"

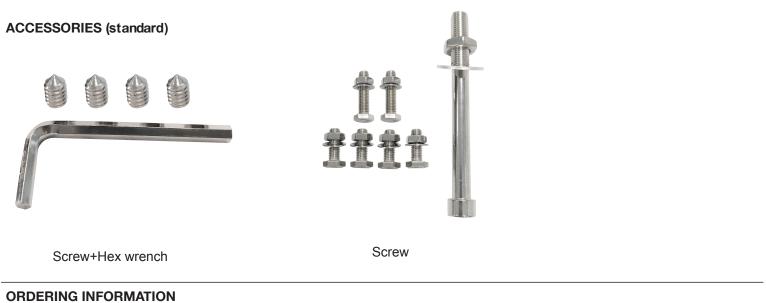

EXAMPLE:

SB-SPST48W5-50K-Z[D, W, B, S]

