

LED Full Cutoff Wall Pack light

Wattages: 28W,42W,56W,70W



The Full Cutoff Wall Pack LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.

WATT/CCT
SELECTABLE



Features:

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED Tj < 85°C .
- Excellent Optics design, greatly improve the light utilization and evenness.
- The 1-10V Dimming type is continuous.

Packaging information:

❖ SB-WPF2842567W27-345K:


Carton Size:395MMX230MMX140MM
15.55" X9.06" X5.51" (1Pcs/CTN)

SPECIFICATION				
TYPE	SB-WPF2842567W27-345K			
WATTAGE	28W	42W	56W	70W
LUMEN	4116 lm (28W&4000K)	6174 lm (42W&4000K)	7840 lm (56W&4000K)	9800 lm (70W&4000K)
EFFICACY	> 140 lm/W			
CCT	3000K,4000K,5000K			
CRI	> 70			
INPUT VOLTAGE	AC120-277V			
LIGHTING ANGLE	99.5X77.6°			
FACTORY SETTINGS	70W & 4000K			
LED TYPE	2835			
PF	> 0.95			
DRIVER EFFICIENCY	> 89%			
PROTECTION LEVEL	WET			
LIFE TIME	> 50000 hours			
WARRANTY	5 year limited			

LED Full Cutoff Wall Pack light

Wattages: 28W,42W,56W,70W

DIMENSION:

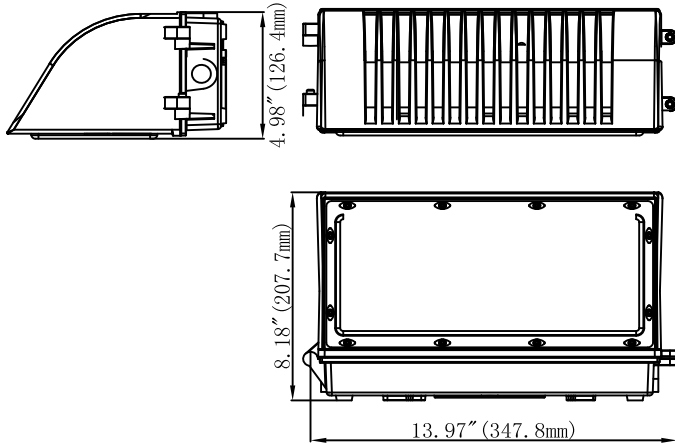

Specifications:

Shell materials: Aluminum & PC.
 Net weight : 6.26 lbs
 Finish: Dark Bronze(Standard)
 Product Size:347.8mmX126.4mmX207.7mm
 13.97”X4.98”X8.18”

Control Module:

The LED Full Cutoff Wall Pack light can adjust the power and color temperature of the whole lamp, which is convenient and fast. The power and color temperature can be selected according to the actual needs of customers.



**WATT/CCT
SELECTABLE**

ORDERING INFORMATION:

EXXAMPLLE:::

SB-WPF2842567W27-345K-Z[D,W,B,S]-Y[Blank,P]

SB	WPF	2842567	27	345K	Z	Y
COMPANY	PRODUCT	POWER	VOLTAGE	CCT	FINISH	CONTROL
SB LED INC	WPF Full Cutoff Wall Pack light	2842567 28W/42W 56W/70W	27 AC120-277V	345K 3000K/4000K/5000K	D (Dark Bronze) W (White) B (Black) S (Silvery)	P (Photocell)


LED Full Cutoff Wall Pack light

Wattages: 28W,42W,56W,70W


PHOTOMETRICS:

For complete IES files, please visit our website.


SB-WPF2842567W27-345K (28W&4000K)

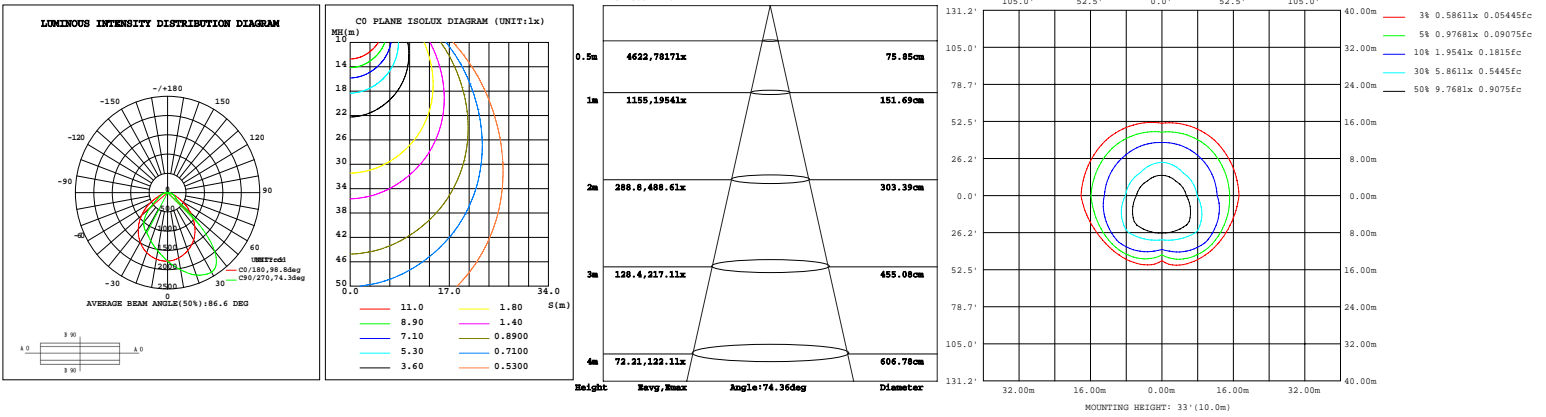

SB-WPF2842567W27-345K (42W&4000K)

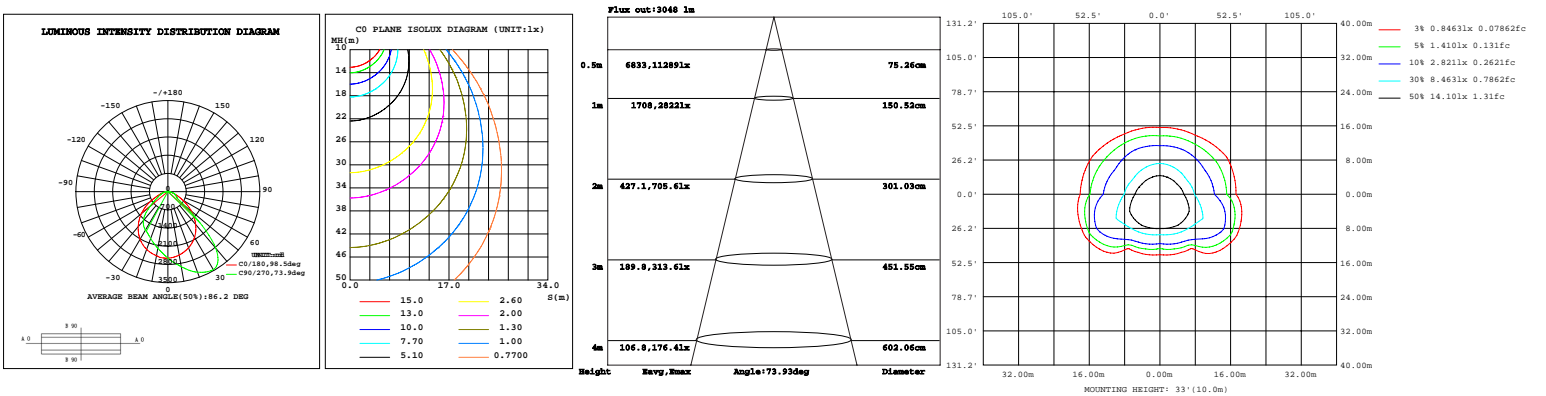

SB-WPF2842567W27-345K(56W&4000K)

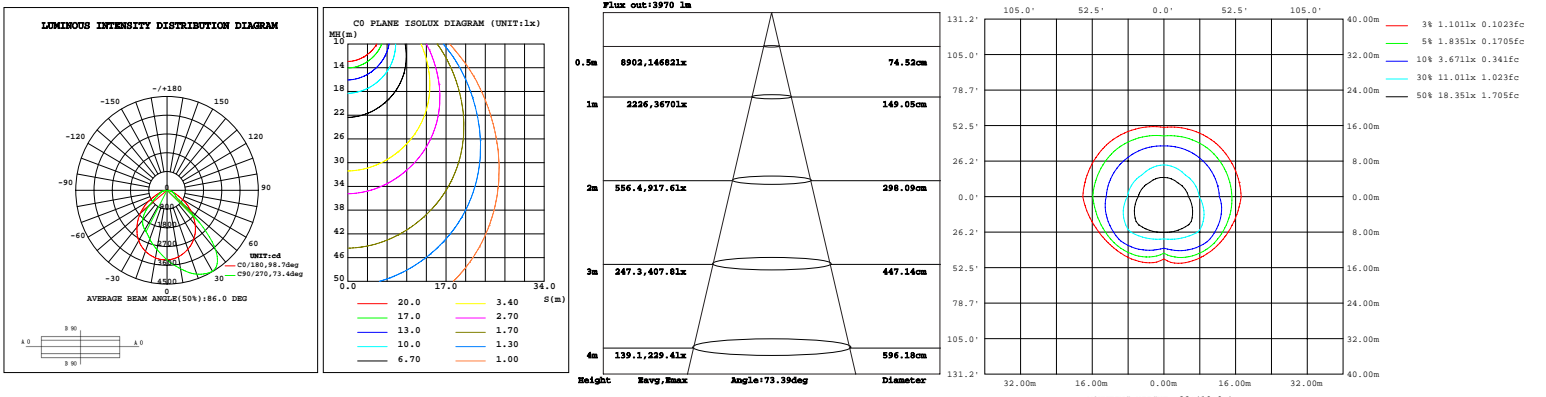


LED Full Cutoff Wall Pack light

Wattages: 28W,42W,56W,70W

PHOTOMETRICS:

For complete IES files, please visit our website.

SB-WPF2842567W27-345K(70W&4000K)

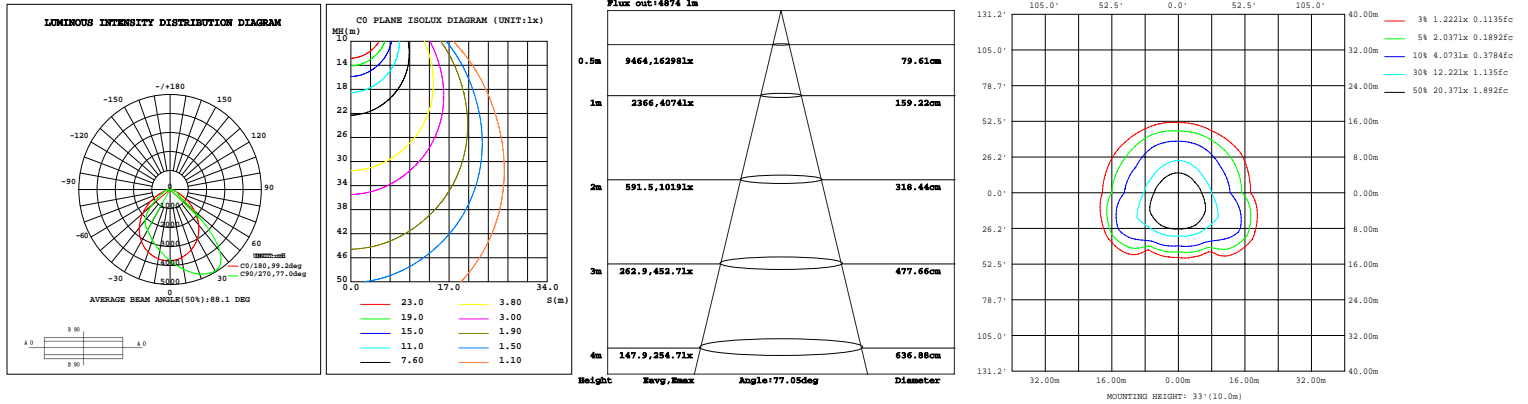

BUG REPORT

Test: U:120.00V I:0.5686A P:67.580W PF:0.9905 Freq:60.00Hz Lamp Flux:9829.32x1 lm		
NAME: LED Full Cutoff Wall Pack light	TYPE: LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1813.6	18.5
FM - Front-Medium(30-60)	3504.3	35.7
FH - Front-High(60-80)	694.18	7.1
FVH - Front-Very High(80-90)	53.168	0.5
Total Forward Light	6065.2	61.7

BL - Back-Low(0-30)	1258.1	12.8
BM - Back-Medium(30-60)	1978.9	20.1
BH - Back-High(60-80)	483.54	4.9
BVH - Back-Very High(80-90)	43.574	0.4
Total Back Light	3764.1	38.3

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	3764.1	0	3764.1
Street Side	6065.2	0	6065.2