

INSTALLATION INSTRUCTION

Warning

1. Before starting use of the light, please check if the light was damaged during transportation. If any damage shown, please do not install or use it.
2. The products itself and all its components should not be mechanically stressed.
3. Installation must not damage or destroy conducting paths or other parts of the product.
4. Installation of LED product (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
5. Correct electrical polarity needs to be observed. Wrong polarity may damage or destroy the LED products.
6. If fixing on metallic or otherwise conductive surfaces, there should be an electrical insulator between the product and the mounting surface.
7. All LEDs are static sensitive. Precautions should be taken to ensure that LEDs are well protected from ESD during handling, even though the chips are safe in low static-electric discharge events.
8. DO NOT operate LEDs in reverse bias.
9. Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
10. Identify Positive (+) and negative (-) outputs of the power supply by using a multimeter.
11. Electrical connection should be in a dry area unless adequately sealed.
12. This product series emits high light output. DO NOT look directly into the light emitting area. Direct exposure to the light over an extended time period may harm eyes.
13. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

1. MIN 105°C SUPPLY CONDUCTORS / LES FILS D'ALIMENTATION 105°C MIN

2. SUITABLE FOR WET LOCATIONS / CONVIENT AUX EMPLACEMENTS MOUILLÉS


3. CAUTION - RISK OF FIRE. CAUTION - RISK OF SHOCK.

ATTENTION – RISQUE D'INCENDIE. ATTENTION – RISQUE DE CHOC.


4. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

Installation Instruction


1. Loosen the screws on both sides of the lamp (do not remove them), and then take out the installation plate.

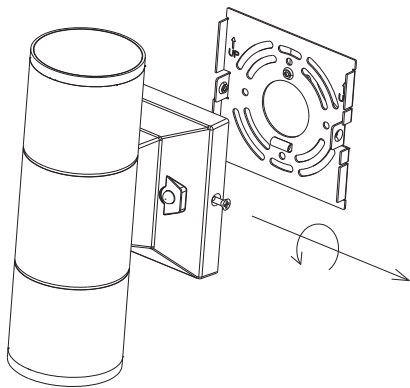


2. Use a straight screwdriver to remove two plugs.

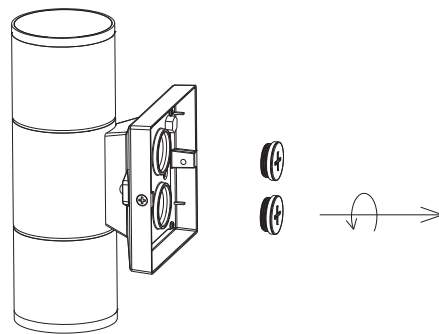


3. If the lighting fixture you purchased comes with optional features such as power, color temperature, or light control, toggle the switch to the desired position.

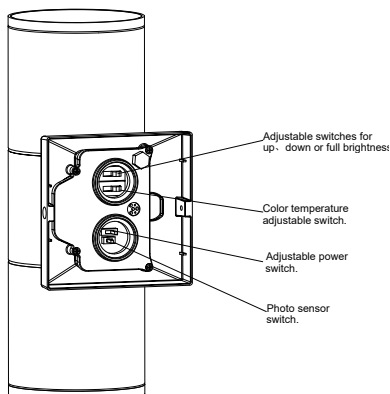



4. Insert the plug with a straight screwdriver

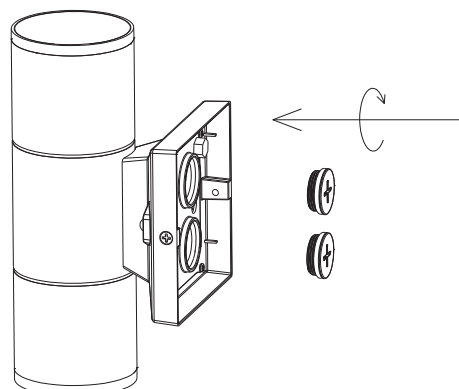


5. Take out the installation pad and installation screws from the accessory package, and then fix the installation pad and installation plate onto the junction box on the wall (Warning: The mark "UP" direction must be installed upside.)

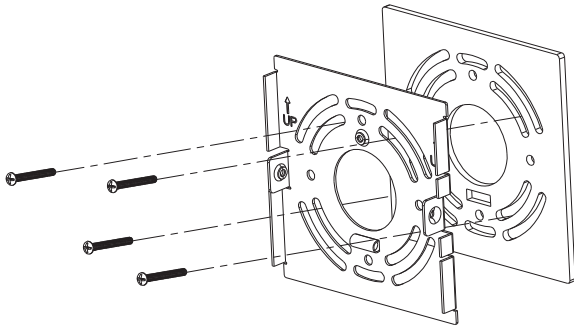


6. Take out the wiring cap from the accessory kit and connect it according to the diagram below.

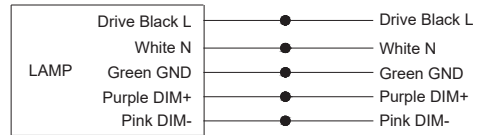

7. Fix the lamp on the mounting plate with screws on both sides of the lamp.

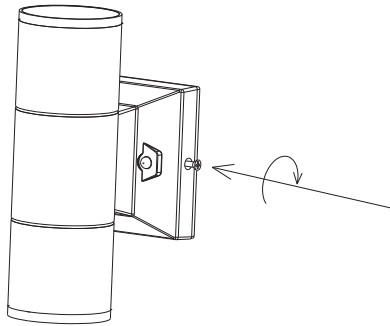

8. Fill the gap between the lamp and the wall with silicone sealant to prevent rainwater from entering the junction box.

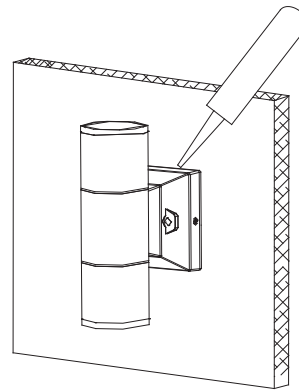

Correct Disposal of this product
To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reus of material resources.